


BC3 RECIRCULATING BALL BEARING RODLESS CYLINDER

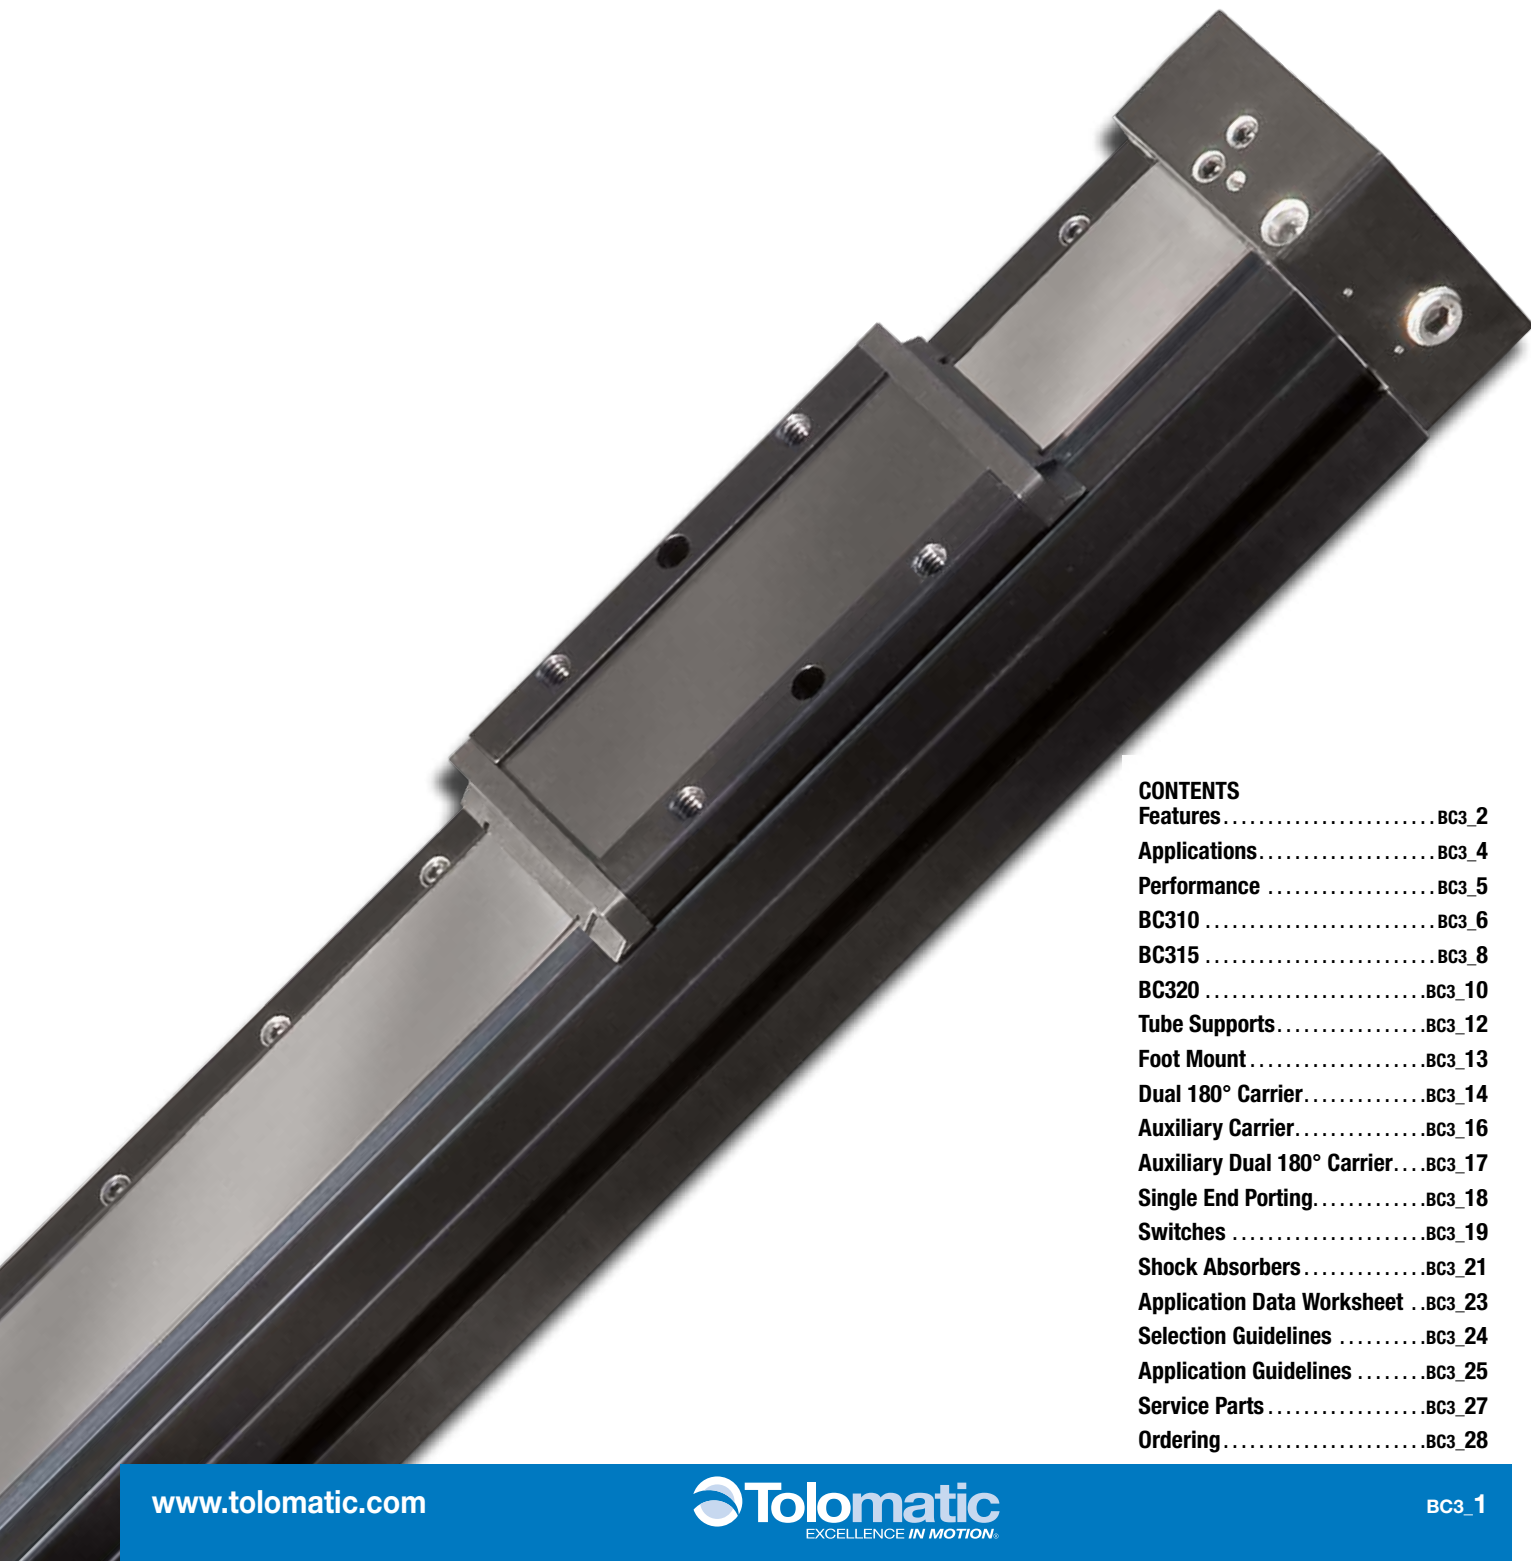

CONTENTS

Features	BC3_2
Applications	BC3_4
Performance	BC3_5
BC310	BC3_6
BC315	BC3_8
BC320	BC3_10
Tube Supports	BC3_12
Foot Mount	BC3_13
Dual 180° Carrier	BC3_14
Auxiliary Carrier	BC3_16
Auxiliary Dual 180° Carrier	BC3_17
Single End Porting	BC3_18
Switches	BC3_19
Shock Absorbers	BC3_21
Application Data Worksheet	BC3_23
Selection Guidelines	BC3_24
Application Guidelines	BC3_25
Service Parts	BC3_27
Ordering	BC3_28

BC3 BAND CYLINDER

● ENDURANCE TECHNOLOGY ●SM

Endurance Technology features are designed for maximum durability to provide extended service life.

The BC3 is the most capable pneumatic rodless cylinder in the industry today. Featuring durable stainless steel bands, a reliable recirculating ball bearing design and smooth, low breakaway pressure the BC3 is a great solution for applications with high load and bending moment requirements. Built-to-order in stroke lengths up to 205 inches.

● FORMED END CAP WIPER SEAL ●

- Keeps contaminants from entering the sealing area
- Protects internal components
- Reduces maintenance while increasing productivity

● SEALED BALL BEARING SYSTEM ●

- All bearing components covered by seal strip
- Bearing components are sealed and lubricated at the factory
- Assures maximum resistance to contamination

● STAINLESS STEEL SEALING BAND SYSTEM ●

- Fatigue resistant stainless steel bands are specifically made to provide longer life and will not elongate, like elastomers
- Outer band keeps out contaminants for extended performance
- Inner band provides a smooth surface for less seal wear

● FORMED STEEL PISTON BRACKET ●

- Provides maximum strength at major stress points
- Heat treated carbon steel withstands the toughest dynamic forces
- Strongest bracket design in the industry assures long life with less maintenance



TOLOMATIC...THE RODLESS CYLINDER LEADER

LOAD-BEARING CARRIER DESIGN


- Load and piston are independent - piston floats, resulting in less friction and longer seal life
- Recirculating ball bearing system guides and supports load for consistent long term performance
- Constant level of friction is maintained even when load orientation changes

ADJUSTABLE CUSHIONS


- Adjustable cushions are standard, not optional
- Easy screw adjustment for end-of-stroke deceleration
- Protects actuator and load from damage

PATENTED WEDGE BEARING SYSTEM

- Bearing surfaces adjusted at the factory for optimum pre-load
- Bearing surfaces adjusted by and supported by a steel wedge assuring long term stability



OPTIONS




AUXILIARY CARRIER

- Substantially higher load capacity
- Substantially higher bending moment capacity



DUAL 180° CARRIER

- Substantially higher load capacity
- Substantially higher bending moment capacity



AUXILIARY DUAL 180°

- Highest load capacity
- Highest bending moment capacity



TUBE SUPPORT MOUNTS

- Used for intermediate support



FOOT MOUNTS

- For end mounting of band cylinder



SHOCK ABSORBERS

- Smooth deceleration, higher productivity
- Allows increased operating speed
- Self-compensates for load or speed changes
- Minimizes impact load to equipment
- Adjustable position shocks available




SWITCHES

- Available in Reed, Hall-effect and Triac
- 15ft. cable with flying leads; available with quick-disconnect couplers

BC3 Recirculating Ball Bearing Rodless Cylinder

APPLICATIONS

Material Handling

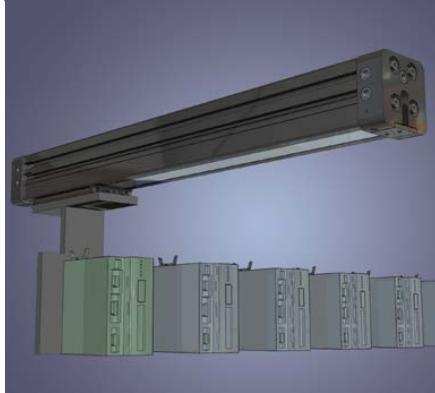

Automatic sorting of products on conveyors.

Customer Challenge:

A manufacturer of sorting equipment had created some in-house automation solutions on their sorting equipment but they could not achieve the speed or reliability to keep up with their distribution requirements. They needed to speed up production and find a way to sort to more locations with limited floor space.


Tolomatic Solution:

A BC3 rodless pneumatic cylinder with was selected for this application because of their space-saving characteristics. The BC3 cylinder sits parallel over the top of the conveyor and is fitted with a paddle. The BC3 cylinder moves the paddle which pushes product both directions to different conveyors. Speed requirements of 30 in/sec were achieved easily achieved.

Result:

The rodless approach provided long-lasting durability for reliable performance at the required speed. The customer achieved flexibility on the number of products they could sort and increased the number of sorting locations maximizing their limited floor space. Most important, they were able to meet their distribution demands. The customer ordered 300 units for a total of \$400,000.

Material Handling

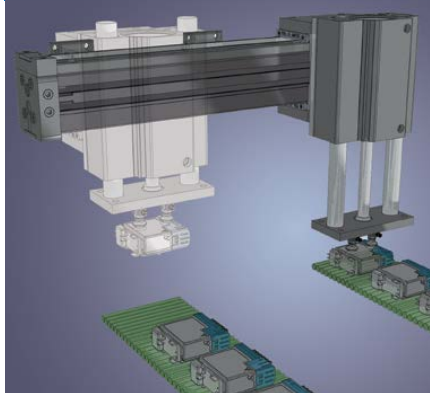

A pick and place application for moving product between conveyors.

Customer Challenge:

A manufacturer of consumer electronic equipment needed a method to move finished product from one conveyor to another quickly without damage or waste.

Application Requirements:

- Fast response, throughput of 20 products per minute
- Consistent positioning
- End-of-stroke adjustment to accommodate varying product lines


Tolomatic Solution:

This side mounted BC3D Band Cylinder with dual 180° option provides the motion along the X axis and support for the PB2 rod cylinder slide which provides the Y axis motion. In this application dual vacuum cups are used, however they are often replaced with a gripper unit with custom tooled fingers for product that does not present a smooth flat surface.

Result:

This continuing customer is pleased with the durability, price and delivery that the BC3 and PB2 actuators manufactured by Tolomatic provide.

Material Handling

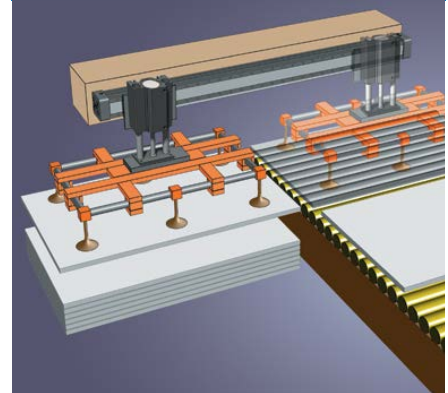

Vacuumized sheet transfer application.

Customer Challenge:

A manufacturer of battery chargers needed a method of taking sheet metal off of pallets and placing onto the assembly line. Speed is critical and end-of-stroke position must be consistent, thus, Tolomatic pneumatic products were chosen for this system.

Application Requirements:

- Fast response, 1 part must be reoriented and moved each 3 seconds
- Movement from end-of-stroke to end-of-stroke with consistent positioning
- Low cost
- End-of-stroke adjustment

Tolomatic Solution:


This application uses a Tolomatic PB2 Rod Cylinder Slide, attached to a BC3 Band Cylinder with adjustable shocks. This actuator assembly moves the vacuum grid attachment that holds the sheet metal.

Result:


The BC3 and PB2 has long-lasting durability for reliable performance at the required speed. This continuing customer is pleased with the price and delivery that Tolomatic provides.

BC3 Recirculating Ball Bearing Rodless Cylinder

PERFORMANCE

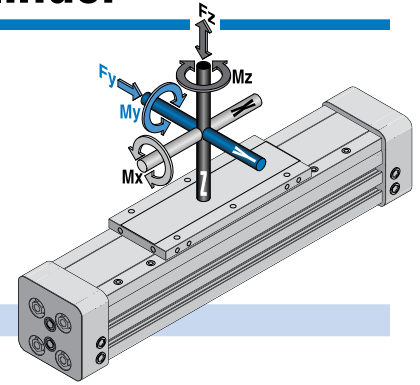


THEORETICAL FORCE vs PRESSURE

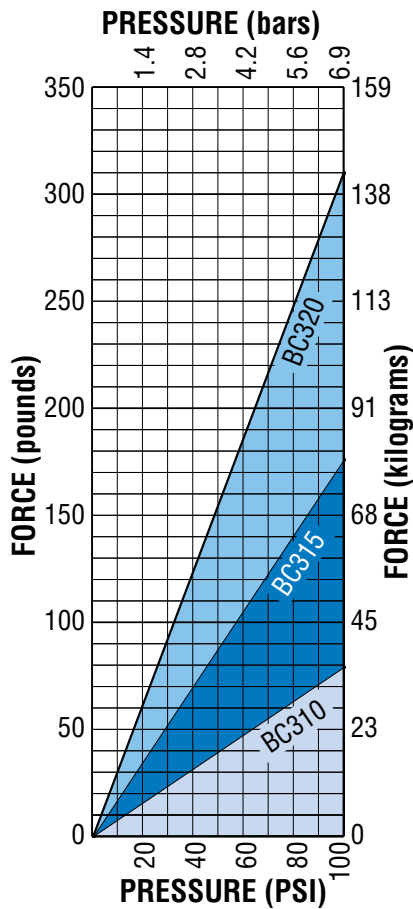


BENDING MOMENTS, LOAD

STANDARD ACTUATOR

BENDING MOMENTS

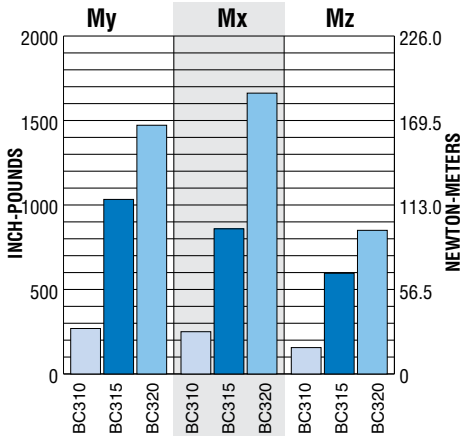


MAX. LOAD

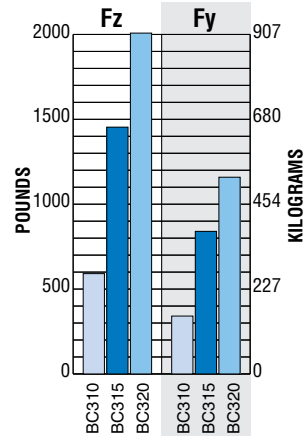


AUXILIARY CARRIER & DUAL 180° CARRIER** OPTIONS

BENDING MOMENTS

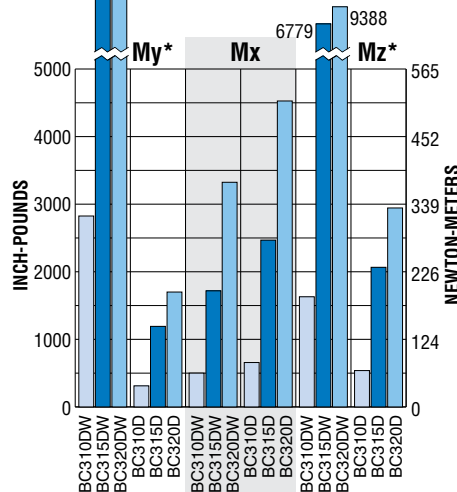

MAX. LOAD

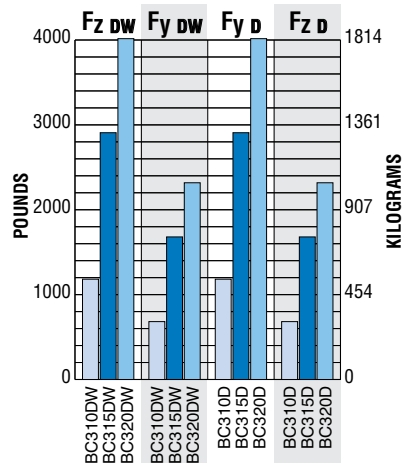

*Auxiliary carrier bending moments indicated are at minimum center to center distance. Additional My + Mz load capacity can be obtained by increasing "D" dimension. Refer to auxiliary carrier data on page BC3_16.


**Dual 180° carrier bending moments are not an exact comparison with other types of carriers. See page BC3_14.

BC310 Band Cylinder

PERFORMANCE

BC310	
	
BC310 OPTIONS	Page
Auxiliary Carrier	BC3_16
Auxiliary Dual 180° Carrier	BC3_17
Dual 180° Carrier	BC3_14
Foot Mounts	BC3_13
Shock Absorbers	BC3_21
Switches	BC3_19
Tube Supports	BC3_12
MORE INFORMATION	Page
Application Guidelines	BC3_25
Cushion Needle Adjustment	BC3_25
Ordering	BC3_28
Selection	BC3_24
STANDARD FEATURE	Page
Single End Porting	BC3_18


CUSHION DATA

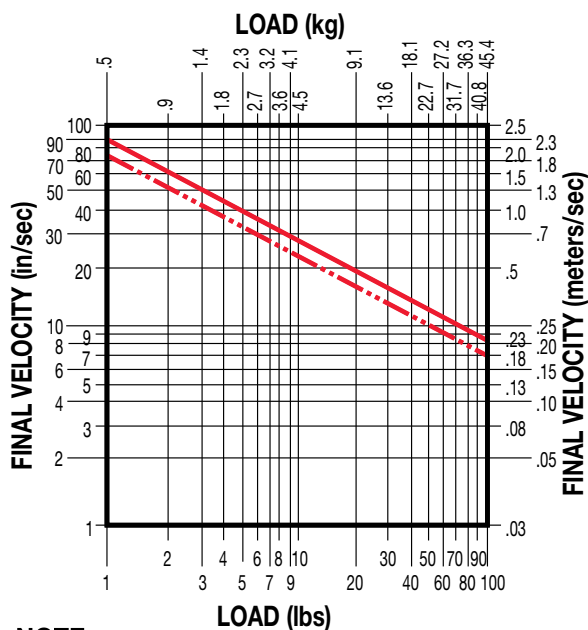



NOTE:

- Max. for any application
- Max. for continuously cycled application

THEORETICAL FORCE vs PRESSURE

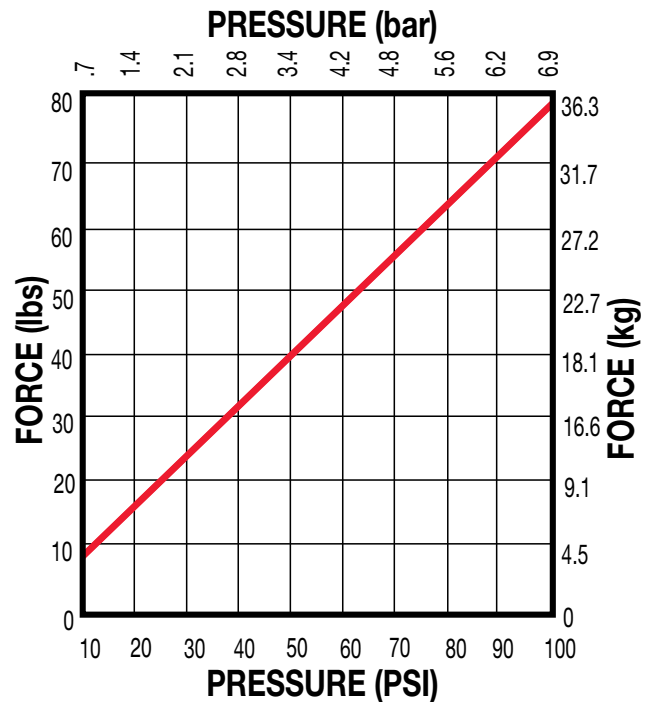

TUBE SUPPORT REQUIREMENTS

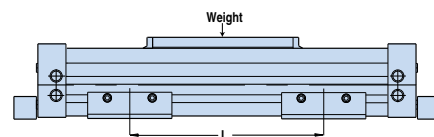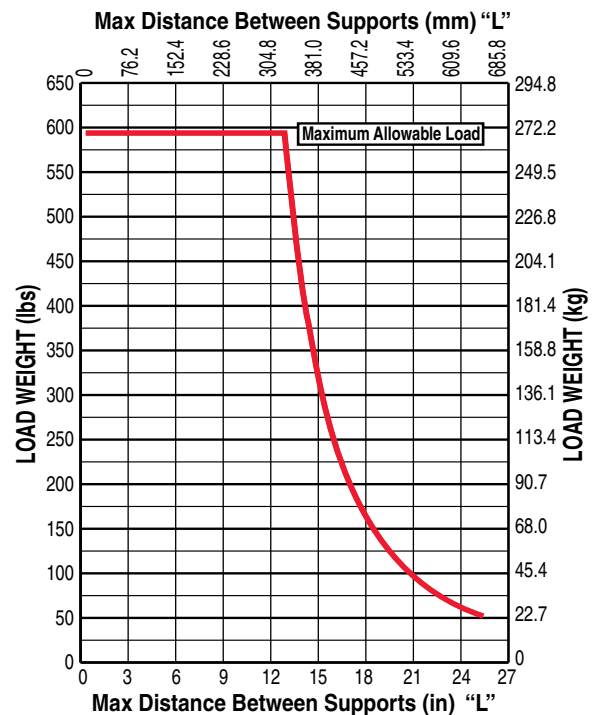


BC310 Band Cylinder

3D CAD available at
www.tolomatic.com




DIMENSIONS

Always use configured CAD solid model
to determine critical dimensions

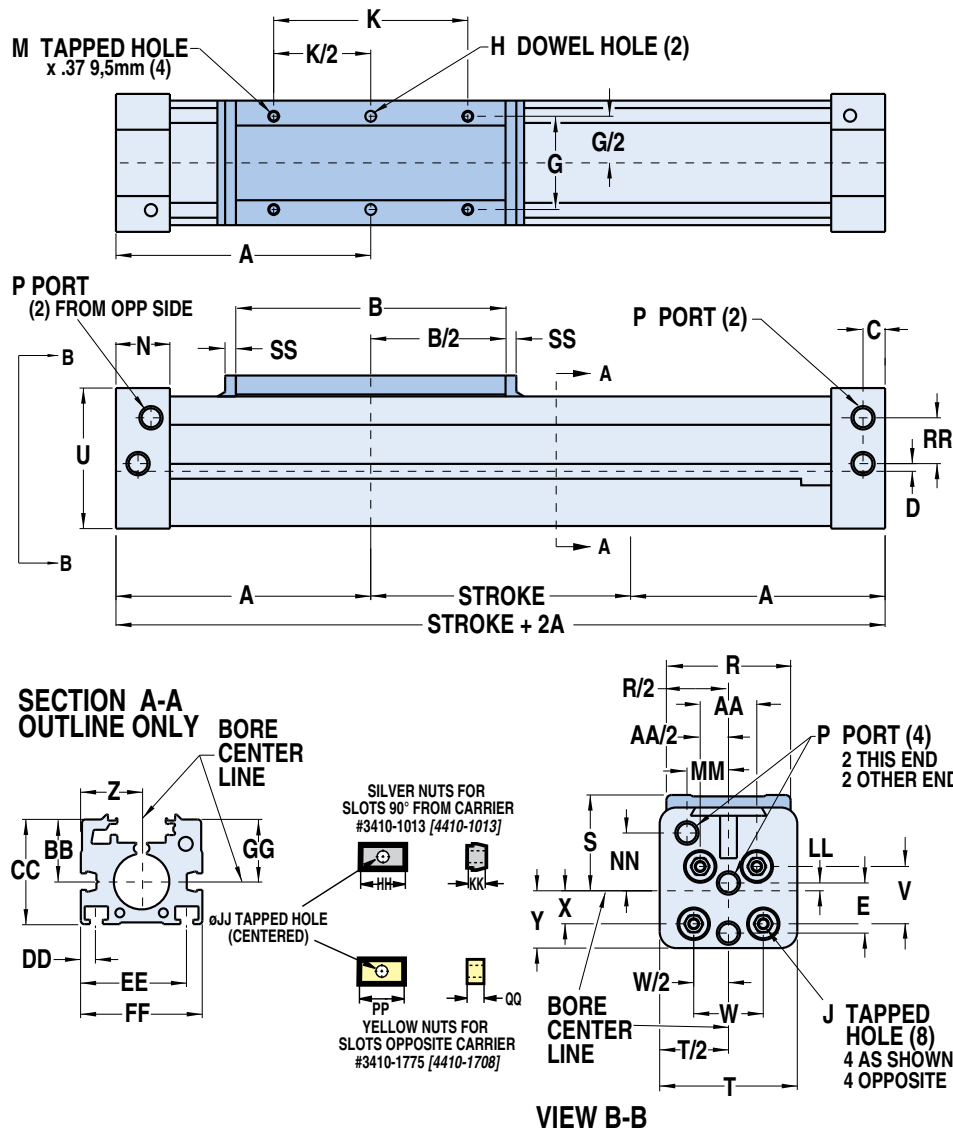

SPECIFICATIONS

BC310 BENDING MOMENTS AND LOAD



	BORE SIZE	MAX. BENDING MOMENT			MAX. LOAD	
		My	Mx	Mz	Fz	Fy
U.S.	1.00 in	269 in-lbs	250 in-lbs	156 in-lbs	591 lbs	341 lbs
Metric	25 mm	30.4 N-m	28.2 N-m	17.9 N-m	268.1 kg	154.7 kg

	MODELS	
	U.S Standard	Metric
A	3.94	100.0
B	3.67	93.3
C	.45	11.4
D	.047	1.19
E	.611	15.52
G	1.781	45.24
H*	.252/.251 x .25	6.045/6.020 x 6.4
J	10-24 x .43	M5-0.8 x 11.0
K	2.250	57.15
M	1/4-20	M6-1.0
N	1.00	25.4
P	1/8-27 NPT	TP 1/8-28 BSPT GP 1/8-28 BSPP
R	2.16	54.8
S	1.54	39.1
T	2.19	55.6
U	2.17	55.1
V	.750	19.05
W	1.250	31.75
X	.330	8.38
Y	.76	19.3
Z	1.094	27.79
AA	1.063	27.00
BB	1.12	28.45
CC	1.88	47.8
DD	.266	6.76
EE	1.922	48.82
FF	2.19	55.6
GG	1.12	28.45
HH	.66	16.8
JJ	10-24	M5-0.8
KK	.25	6.4
LL	.142	3.61
MM	.547	13.89
NN	.890	22.6
PP	.75	19.1
QQ	.188	4.8
RR	.845	21.46
SS	.203	5.2
INCHES		MILLIMETERS

*DOWEL PINS \varnothing .003 \varnothing .076 \varnothing

	BORE SIZE	WEIGHT		MAX. STROKE LENGTH**	MAX. PRESSURE	TEMPERATURE RANGE
		BASE	PER UNIT OF STROKE			
U.S. Standard	1.00 in	2.71 lbs	0.23 lbs/in	205 in	100 PSI	20° to 140° F
Metric	25 mm	1.23 kg	0.0041 kg/mm	5207 mm	6.895 bar	-7° to 60° C


****For longer strokes, alternate materials, mounting and/or fasteners – consult Tolomatic**

BC315 Band Cylinder


PERFORMANCE

BC315	
	
BC315 OPTIONS	Page
Auxiliary Carrier	BC3_16
Auxiliary Dual 180° Carrier	BC3_17
Dual 180° Carrier	BC3_14
Foot Mounts	BC3_13
Shock Absorbers	BC3_21
Switches	BC3_19
Tube Supports	BC3_12
MORE INFORMATION	Page
Application Guidelines	BC3_25
Cushion Needle Adjustment	BC3_25
Ordering	BC3_28
Selection	BC3_24
STANDARD FEATURE	Page
Single End Porting	BC3_18


CUSHION DATA

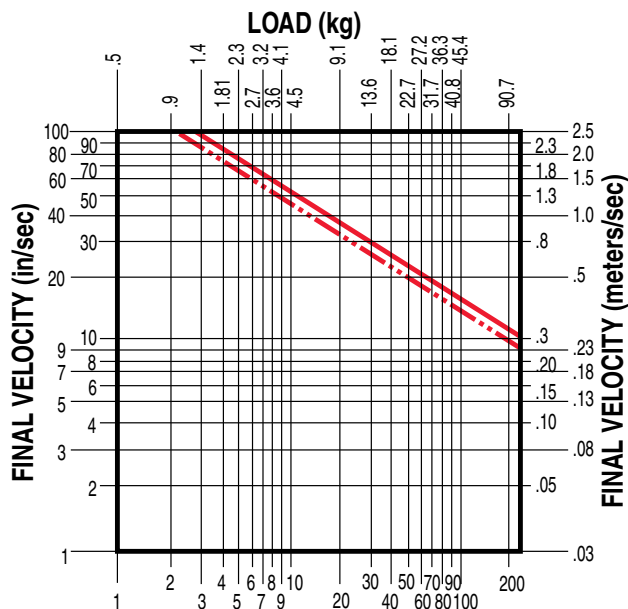

THEORETICAL FORCE vs PRESSURE

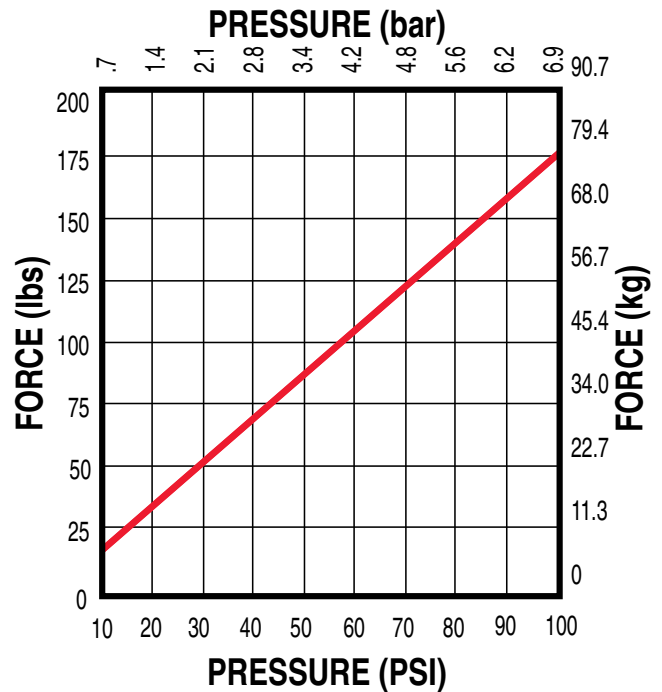

TUBE SUPPORT REQUIREMENTS

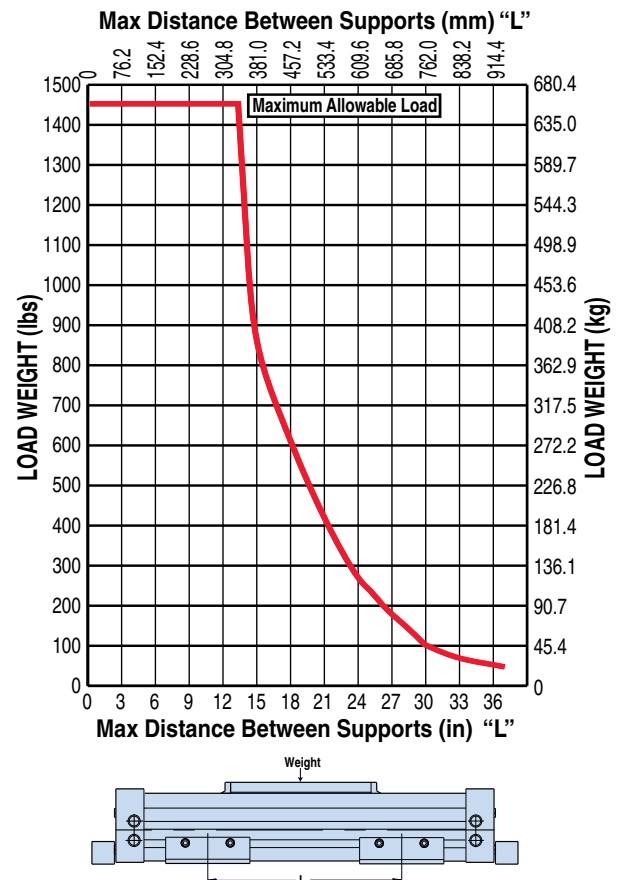


BC315 Band Cylinder

DIMENSIONS

3D CAD available at
www.tolomatic.com




Always use configured CAD solid model
to determine critical dimensions

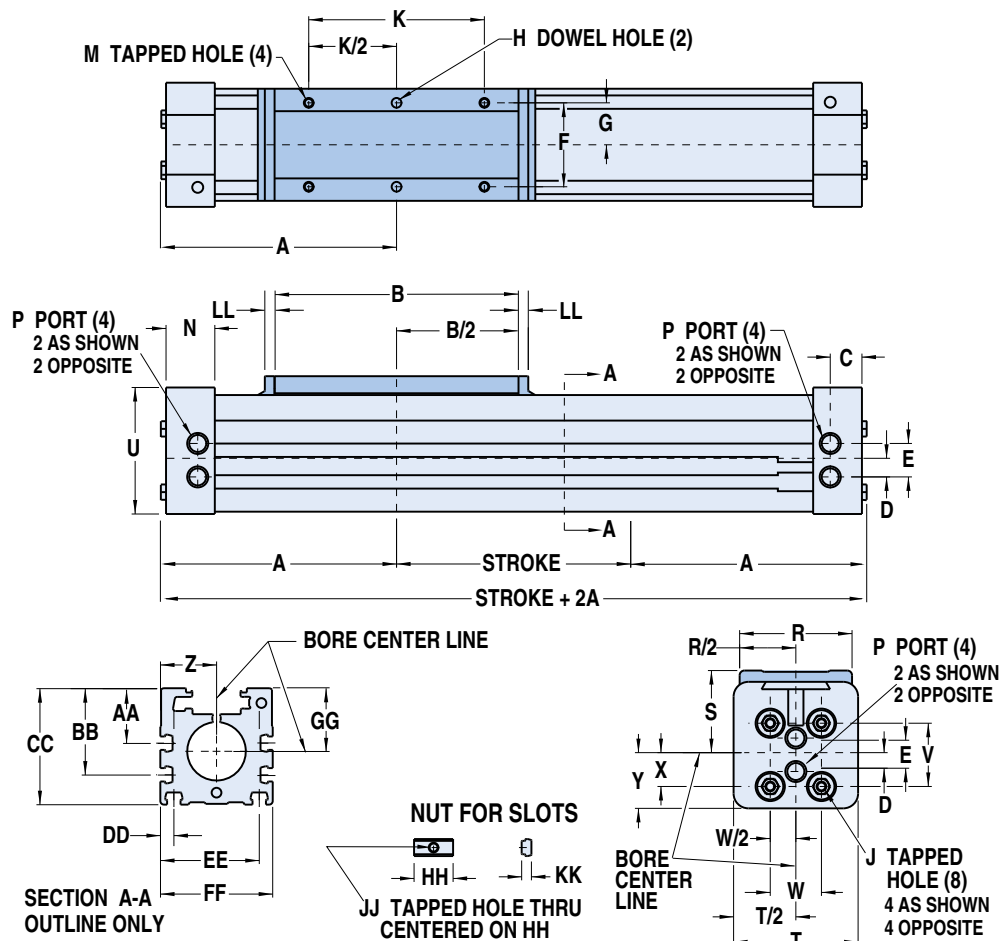

	MODELS	
	U.S. Std.	Metric
A	5.93	150.7
B	6.25	158.8
C	.84	21.3
D	.48	12.2
E	.86	21.8
F	2.156	54.76
G	1.078	27.38
H*	.252-.251 x .25	6.045-6.020 x 6.4
J	1/4-20 x .47	M6-1 x 12
K	4.500	114.30
M	1/4-20 X .44	M6- x 11
N	1.27	32.3
P	1/4-18 NPT	TP 1/4-19 BSPT GP 1/4-19 BSPP
R	2.88	73.0
S	2.109	53.57
T	3.19	81.0
U	3.25	82.6
V	1.625	41.28
W	1.313	33.35
X	.875	22.23
Y	1.46	37.1
Z	1.44	36.5
AA	1.41	35.81
BB	2.22	56.38
CC	2.99	75.95
DD	.35	8.9
EE	2.53	64.3
FF	2.88	73.0
GG	1.62	41.15
HH	.75	19.1
JJ	1/4-20	M6-1
KK	.25	6.4
LL	.25	6.4
INCHES		MILLIMETERS

SPECIFICATIONS

BC315 BENDING MOMENTS AND LOAD



	BORE SIZE	MAX. BENDING MOMENT			MAX. LOAD	
		M_y	M_x	M_z	F_z	F_y
U.S.	1.50 in	1033 in-lbs	859 in-lbs	596 in-lbs	1454 lbs	840 lbs
Metric	40 mm	116.7 N-m	97.1 N-m	67.3 N-m	659.5 kg	381.0 kg

*DOWEL PINS	\varnothing	.003	\varnothing
	\varnothing	.076	\varnothing

	BORE SIZE	WEIGHT		MAX. STROKE LENGTH**	MAX. PRESSURE	TEMPERATURE RANGE
		BASE	PER UNIT OF STROKE			
U.S. Standard	1.50 in	10.94 lbs	0.53 lbs/in	202 in	100 PSI	20° to 140° F
Metric	40 mm	4.96 kg	0.0095 kg/mm	5130 mm	6.895 bar	-7° to 60° C


****For longer strokes, alternate materials, mounting and/or fasteners – consult Tolomatic**

BC320 Band Cylinder

PERFORMANCE

BC320	
	
ORDER CODES	
BC320	inch (U.S. Standard)
BC3M20	(metric with taper port)
BC3MM20	(metric with parallel port)
BC320 OPTIONS	Page
Auxiliary Carrier	BC3_16
Auxiliary Dual 180° Carrier	BC3_17
Dual 180° Carrier	BC3_14
Foot Mounts	BC3_13
Shock Absorbers	BC3_21
Switches	BC3_19
Tube Supports	BC3_12
MORE INFORMATION	Page
Application Guidelines	BC3_25
Cushion Needle Adjustment	BC3_25
Ordering	BC3_28
Selection	BC3_24
STANDARD FEATURE	Page
Single End Porting	BC3_18


CUSHION DATA

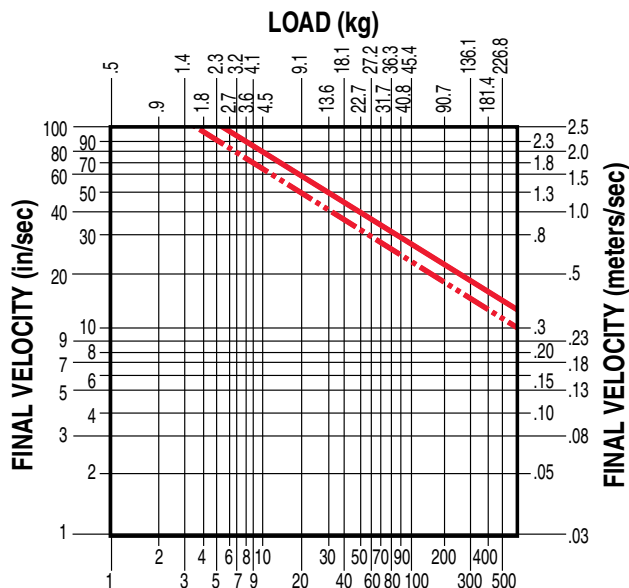



NOTE:

- Max. for any application
- Max. for continuously cycled application

THEORETICAL FORCE vs PRESSURE

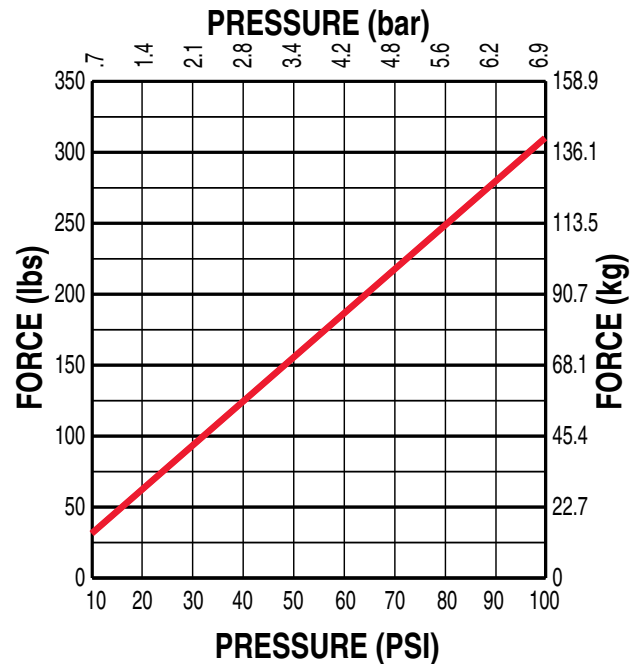


TUBE SUPPORT REQUIREMENTS

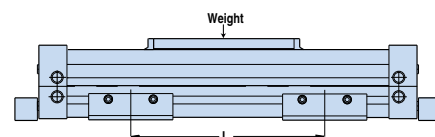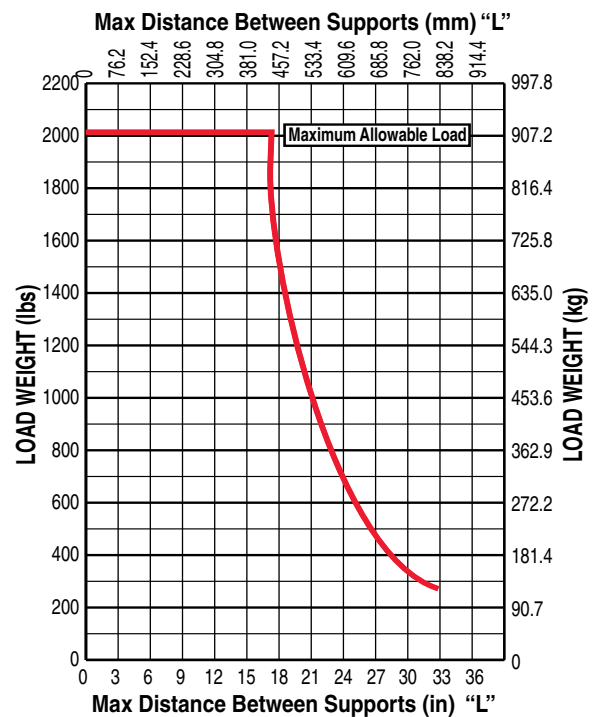


DIMENSIONS



CAD

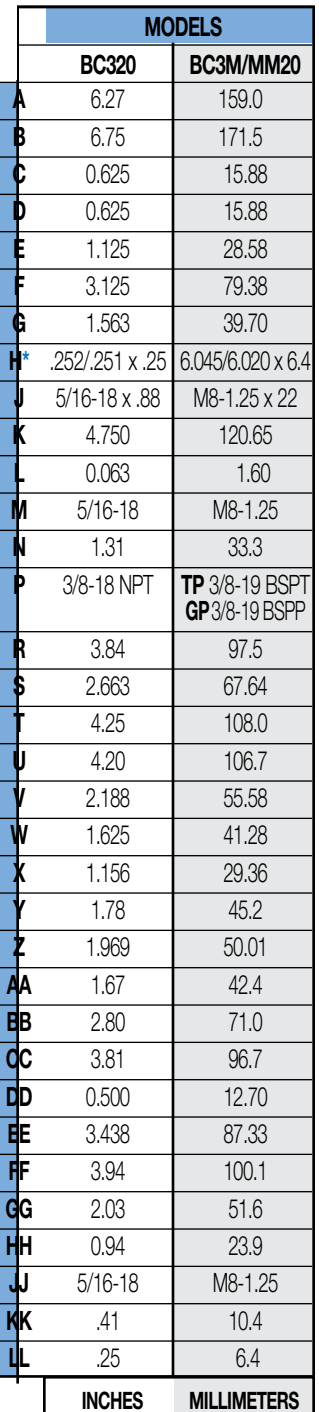


BC320 BENDING MOMENTS AND LOAD

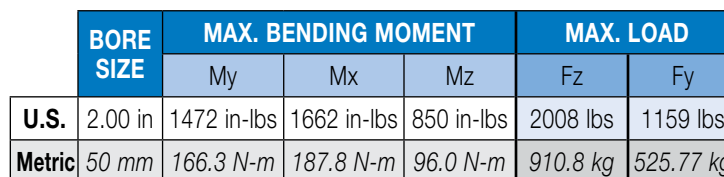

****For longer strokes, alternate materials, mounting and/or fasteners – consult Tolomatic**



BC3 TUBE SUPPORTS - All Sizes

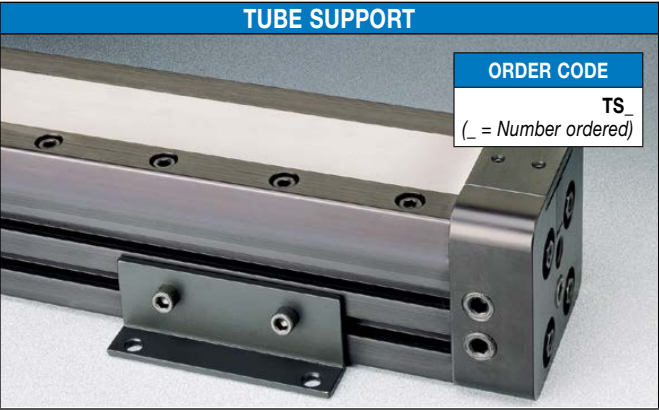


For intermediate support, tube support brackets can be mounted to the BC3 model. Made of black-anodized aluminum, the brackets are attached to the bottom and sides of the cylinder tube with rail nuts. The number of tube support brackets required and their placement depends on the overall length of the BC3 model and the load weight being moved and supported. Refer to the tube support data chart below. Note: Switches cannot be mounted on the same face of the actuator as tube supports.

PERFORMANCE

TUBE SUPPORT REQUIREMENTS

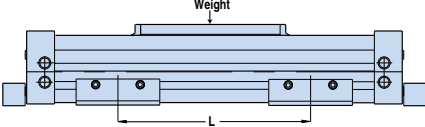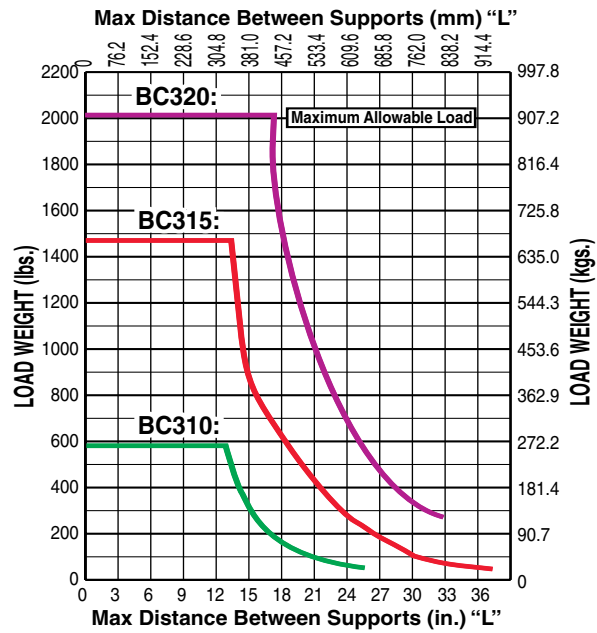

DIMENSIONS

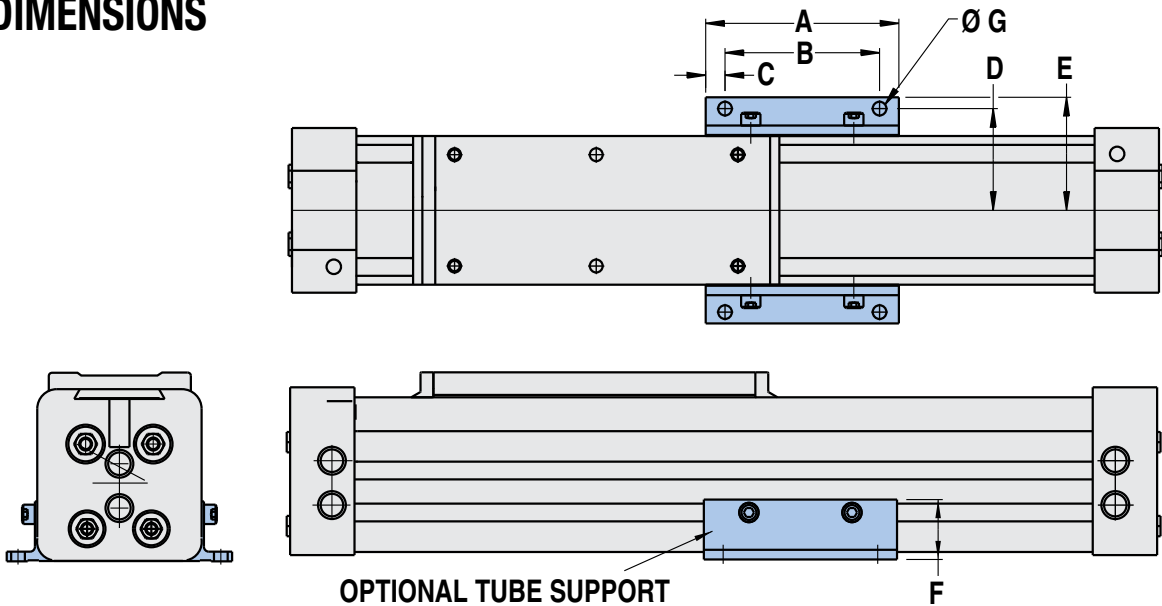

	BORE SIZE	A	B	C	D	E	F	G
10	1.00	2.75	2.250	0.25	1.53	1.76	1.09	0.206
15	1.50	3.75	3.000	0.38	1.97	2.19	1.16	0.266
20	2.00	4.00	3.375	0.31	2.56	2.84	1.50	0.328

Dimensions in inches

	BORE SIZE	A	B	C	D	E	F	G
10	25	69.85	57.15	6.4	38.9	44.7	27.7	5.232
15	40	95.30	76.20	9.7	50.0	55.6	29.5	6.756
20	50	101.60	85.73	7.9	65.0	72.1	38.1	8.331

Dimensions in millimeters

BC3 FOOT MOUNT KIT - All Sizes

3D CAD available at
www.tolomatic.com




Always use configured CAD solid model
to determine critical dimensions



Foot mounts are an option on BC3 Series Band Cylinders when an application requires the mounting to be different than flush. They may be specified on one or both ends of the cylinder.

DIMENSIONS

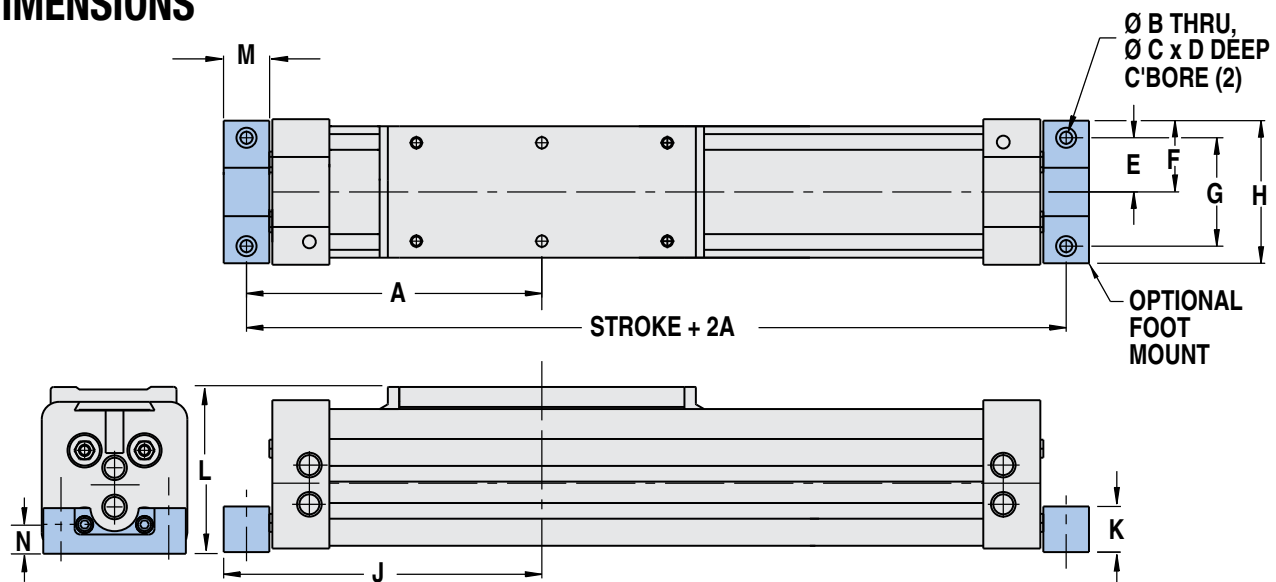


	BORE SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N
10	1.00	4.31	Ø.206	Ø .38	0.22	0.906	1.095	1.812	2.19	4.69	0.88	2.44	0.75	0.574
15	1.25	6.43	Ø.266	Ø .44	0.28	1.188	1.560	2.375	3.13	6.93	1.00	3.63	1.00	0.641
20	1.50	6.80	Ø.328	Ø .53	0.34	1.500	2.000	3.000	4.00	7.30	1.13	4.53	1.00	0.719

Dimensions in inches

	BORE SIZE	A	B	C	D	E	F	G	H	J	K	L	M	N
10	25	109.5	Ø 5.23	Ø 9.7	5.6	23.01	27.8	46.02	55.6	119.1	22.4	62.0	19.1	14.6
15	32	163.4	Ø 6.76	Ø 11.2	7.1	30.18	39.7	60.33	79.4	176.1	25.4	92.2	25.4	16.3
20	40	172.7	Ø 8.33	Ø 13.5	8.6	38.10	50.8	76.20	101.6	185.4	28.7	115.1	25.4	18.3

Dimensions in millimeters

BC3 DUAL 180° CARRIER - All Sizes

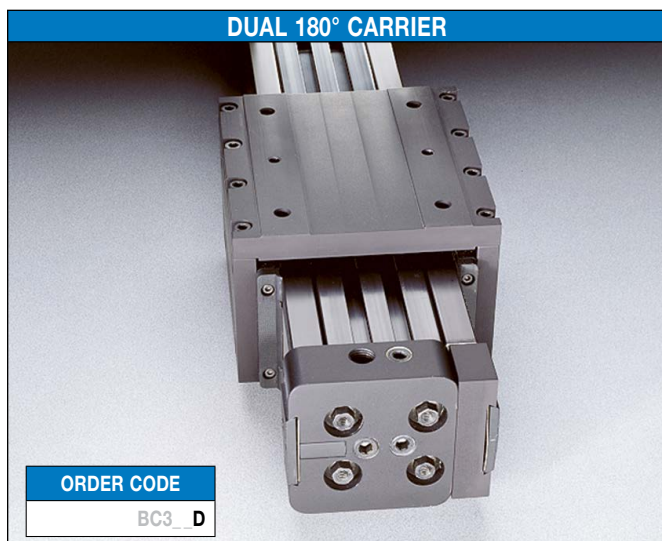


DUAL 180° CARRIER

The Dual 180° Carrier option may be used when load factors exceed those of a single carrier actuator. This option allows the load to be rotated 90° from the cylinder's carrier providing an additional load bearing mounting surface.

NOTE: The Dual 180° Carrier option requires its own proprietary tube supports and foot mounts. See dimensional information below. Breakaway pressure will increase when using the Dual 180° Carrier option.

PERFORMANCE

BC3D (DUAL 180° CARRIER) BENDING MOMENTS AND LOAD

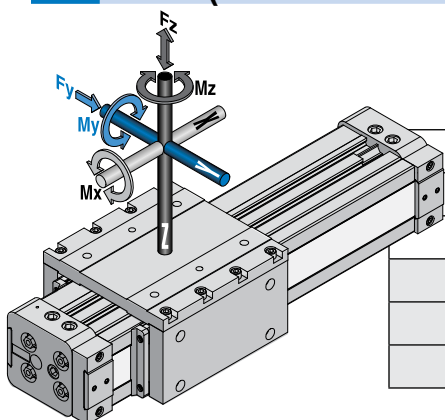

	BORE SIZE	MAX. BENDING MOMENT			MAX. LOAD	
		My	Mx	Mz	Fz	Fy
BC310D	1.00 in.	312 in.-lbs.	657 in.-lbs.	538 in.-lbs.	1182 lbs.	682 lbs.
BC315D	1.50 in.	1192 in.-lbs.	2468 in.-lbs.	2066 in.-lbs.	2908 lbs.	1680 lbs.
BC320D	2.00 in.	1700 in.-lbs.	4527 in.-lbs.	2944 in.-lbs.	4016 lbs.	2318 lbs.
BC310D	25mm	35.3 N-m	74.2 N-m	60.8 N-m	536.1 kgs.	309.3 kgs.
BC315D	40mm	134.7 N-m	278.9 N-m	233.4 N-m	1319.0 kgs.	762.0 kgs.
BC320D	50mm	192.1 N-m	511.5 N-m	332.6 N-m	1821.6 kgs.	1051.4 kgs.

	BORE SIZE	WEIGHT**		MAX. STROKE LENGTH*	MAX. PRESSURE	TEMPERATURE RANGE
		BASE	PER UNIT OF STROKE			
BC310D	1.00 in.	5.37 lbs.	0.32 lbs.	205 in	100 PSI	20° to 140° F
BC315D	1.50 in.	17.2 lbs.	0.69 lbs.	202 in		
BC320D	2.00 in.	28.9 lbs.	1.12 lbs.	142 in		
BC310D	25mm	2.43 kgs.	0.14 kgs.	5207 mm	6.895 bar	-7° to 60° C
BC315D	40mm	7.76 kgs.	0.31 kgs.	5130 mm		
BC320D	50mm	13.11 kgs.	0.50 kgs.	3606 mm		

***For longer strokes, alternate materials, mounting and/or fasteners – consult Tolomatic**



**Use these figures to calculate actuator weight instead of standard weights on pages BC3_7, BC3_9, BC3_11


BC3 DUAL 180° CARRIER - All Sizes

3D CAD available at
www.tolomatic.com



Always use configured CAD solid model
to determine critical dimensions

DIMENSIONS

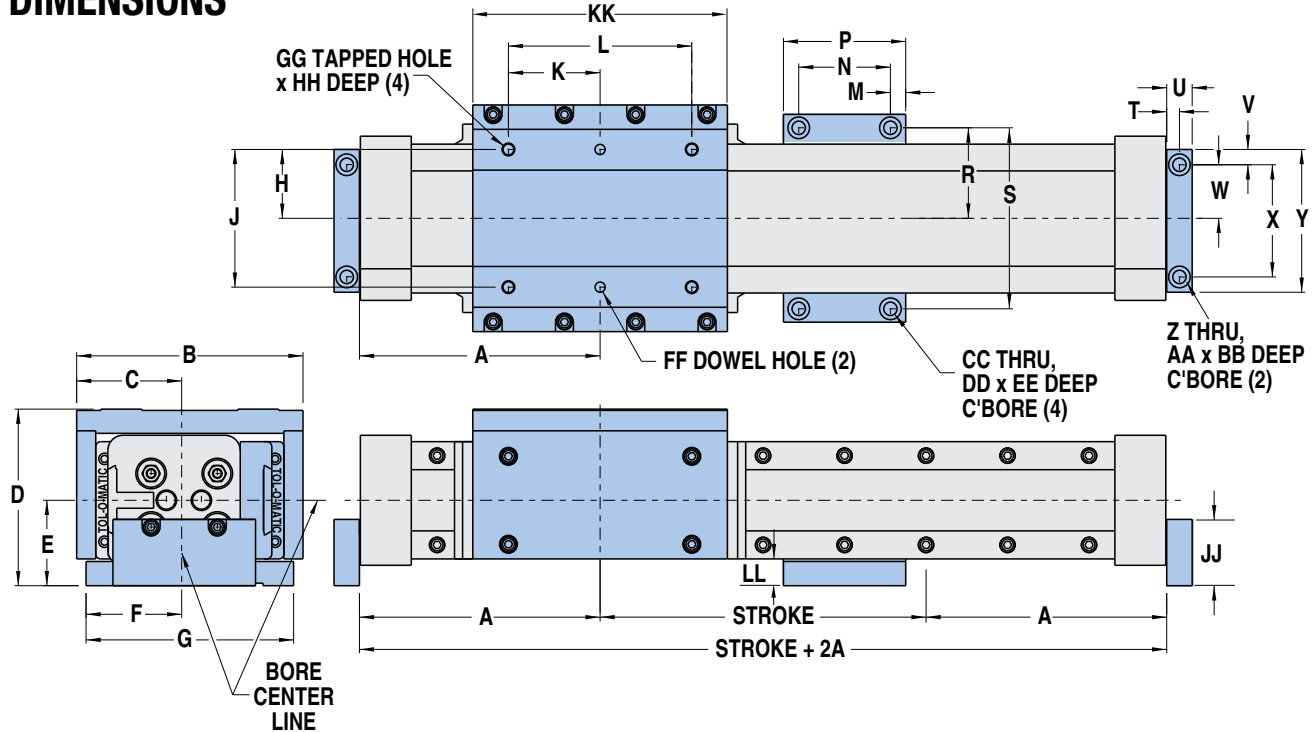

NOTE: In vertical mounting applications, supplemental mounting may be required besides factory foot mounts.

Optional Tube Supports and Foot Mounts are shown.

MODELS	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
BC310	1.0 in.	3.93	4.31	2.13	3.33	1.61	1.75	3.50	1.192	2.437	1.531	3.062	.28	2.563	3.12	1.469	2.937
BC315	1.5 in.	5.93	6.00	2.78	4.33	2.09	2.35	5.09	1.48	3.375	2.250	4.500	.38	2.250	3.00	2.02	4.437
BC320	2.0 in.	6.27	7.41	3.51	5.30	2.59	2.80	6.00	2.358	5.125	3.000	6.000	.38	2.250	3.00	2.422	5.250

MODELS	BORE	T	U	V	W	X	Y	Z	AA	BB	CC	DD	EE	FF*	GG	HH	JJ	KK	LL
BC310	1.0 in.	.307	.62	.28	.891	1.688	2.25	.266	.44	.28	.266	.44	.28	.252/.251 x .25	1/4-20	.47	1.25	3.67	.52
BC315	1.5 in.	.312	.62	.38	1.312	2.750	3.50	.266	.44	.28	.328	.53	.34	.252/.251 x .25	5/16-18	.59	1.62	6.25	.66
BC320	2.0 in.	.312	.62	.31	1.625	3.375	4.00	.328	.53	.34	.391	.63	.41	.252/.251 x .25	3/8-16	.66	2.00	6.75	.63

Dimensions in inches


MODELS	BORE	A	B	C	D	E	F	G	H	J	K	L	M	N	P	R	S
BC310	25 mm	99.8	109.5	54.1	84.6	40.9	44.5	88.9	30.28	61.90	38.89	77.77	7.1	65.10	79.2	37.31	74.60
BC315	40 mm	150.6	152.4	70.61	110.0	53.1	59.7	129.3	37.59	85.73	57.15	114.30	9.7	57.15	76.2	51.31	112.70
BC320	50 mm	159.3	188.2	89.15	135.6	68.8	71.1	152.4	59.89	130.18	76.20	152.40	9.7	57.15	76.2	61.52	133.35

MODELS	BORE	T	U	V	W	X	Y	Z	AA	BB	CC	DD	EE	FF*	GG	HH	JJ	KK	LL
BC310	25 mm	7.80	15.7	7.1	22.63	42.88	57.2	6.76	11.2	7.1	6.8	11.2	7.1	6.045/6.020 x 6.4	M6 x 1.00	11.9	31.8	93.2	13.2
BC315	40 mm	7.92	15.7	9.7	33.32	69.85	88.9	6.76	11.2	7.1	8.33	13.5	8.6	6.045/6.020 x 6.4	M8 x 1.25	15.0	41.1	158.8	16.8
BC320	50 mm	7.92	15.7	7.9	41.28	85.73	101.6	8.33	13.5	8.6	9.93	16.0	10.4	6.045/6.020 x 6.4	M10 x 1.50	16.8	50.8	171.8	16.0

Dimensions in millimeters

*DOWEL PINS	⌀	.003	(M)
	⌀	.076	(M)

BC3 AUXILIARY CARRIER - All Sizes

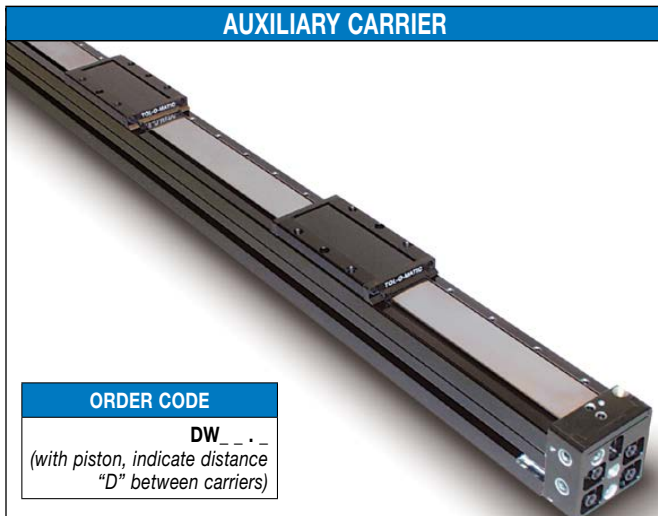

AUXILIARY CARRIER


The auxiliary carrier option substantially increases load carrying capacity and bending moments. Auxiliary carriers can only be ordered with an internal piston. When ordering, determine the minimum distance required between carriers (dimension "D" in Auxiliary Carrier Bending Moments chart below). Determine

ORDERING PROCEDURE your working stroke. Enter these into your configuration string. (Example BC315SK50.00DW10.00) the configurator will calculate the overall length of the actuator.

NOTE: Breakaway pressure will increase when using auxiliary carriers.

PERFORMANCE


BC3--DW (AUXILIARY CARRIER) BENDING MOMENTS AND LOAD

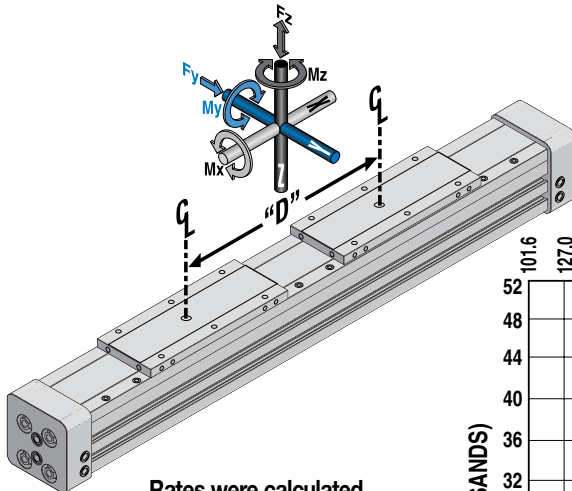

Rates were calculated with the following assumptions:

- 1.) Coupling between carriers is rigid.
- 2.) Load is equally distributed between carriers.
- 3.) Coupling device applies no misalignment loads to carriers.

LOAD vs. DISTANCE BC3 SERIES

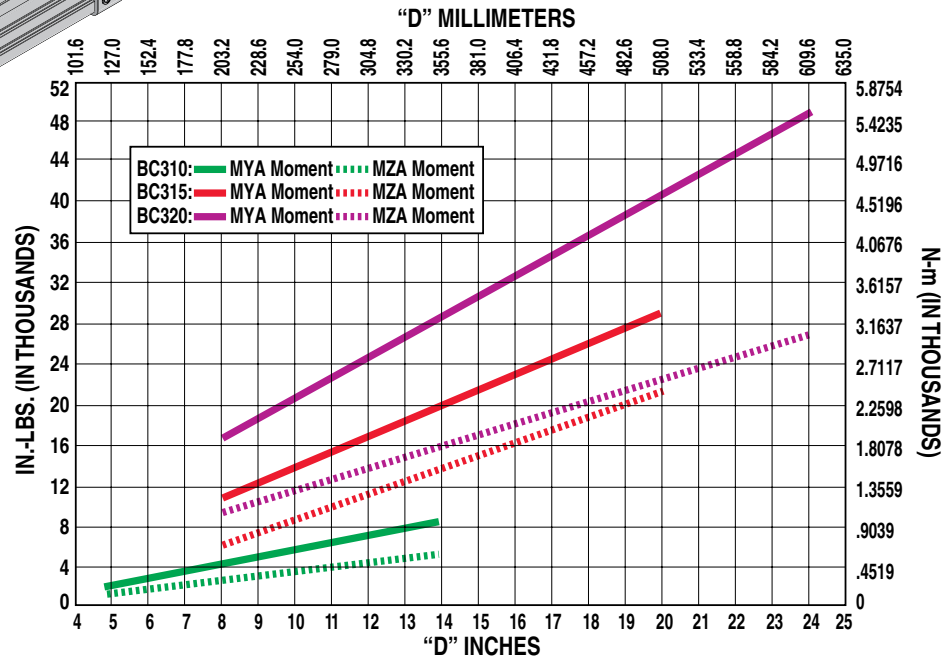


MODEL NO.	"D" MIN.	MAXIMUM BENDING MOMENT			MAXIMUM LOAD	
		M_{YA}^{**}	M_{XA}	M_{ZA}^{**}	F_{ZA}	F_{YA}
BC310DW	4.88 in.	2825 in.-lbs.	500 in.-lbs.	1630 in.-lbs.	1182 lbs.	682 lbs.
BC315DW	8.07 in.	11734 in.-lbs.	1718 in.-lbs.	6779 in.-lbs.	2908 lbs.	1680 lbs.
BC320DW	8.10 in.	16265 in.-lbs.	3324 in.-lbs.	9388 in.-lbs.	4016 lbs.	2318 lbs.
BC310DW	124.0mm	319.2 N-m	56.5 N-m	184.2 N-m	536.1 kgs.	309.3 kgs.
BC315DW	205.0mm	1325.8 N-m	194.1 N-m	765.9 N-m	1319.0 kgs.	762.0 kgs.
BC320DW	205.7mm	1837.8 N-m	375.6 N-m	1060.8 N-m	1821.6 kgs.	1051.4 kgs.

* D is distance between carriers.

** Loads calculated are at minimum "D", for substantially higher $M_y + M_z$ loads increase "D" and refer to graph at left

BC3 AUXILIARY DUAL 180° CARRIER - All Sizes

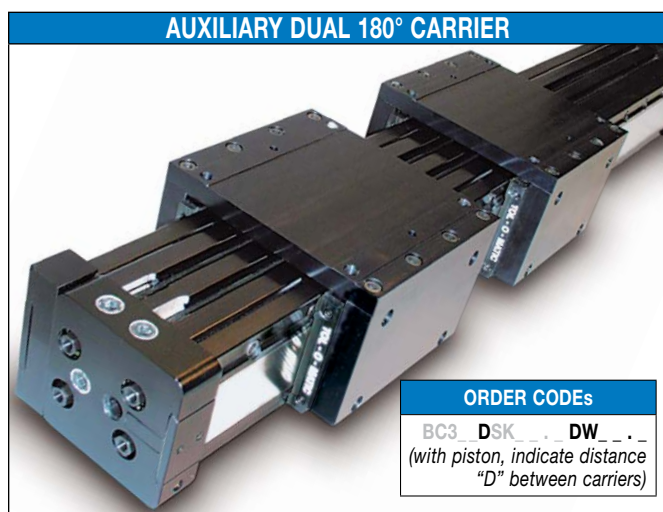

AUXILIARY DUAL 180° CARRIER


The auxiliary dual 180° carrier option substantially increases load carrying capacity and bending moments. Auxiliary carriers can only be ordered with an internal piston. When ordering, determine the minimum distance required between carriers (dimension "D" in Auxiliary Dual 180° Carrier Bending Moments chart below). Determine your working stroke. Enter

these into your configuration string. (Example BC3D15SK50.00DW10.00) The configurator will calculate the overall length of the actuator.

NOTE: Breakaway pressure will increase when using auxiliary dual 180° carriers.

PERFORMANCE


BC3D--DW (DUAL 180°, AUXILIARY CARRIER) BENDING MOMENTS AND LOAD

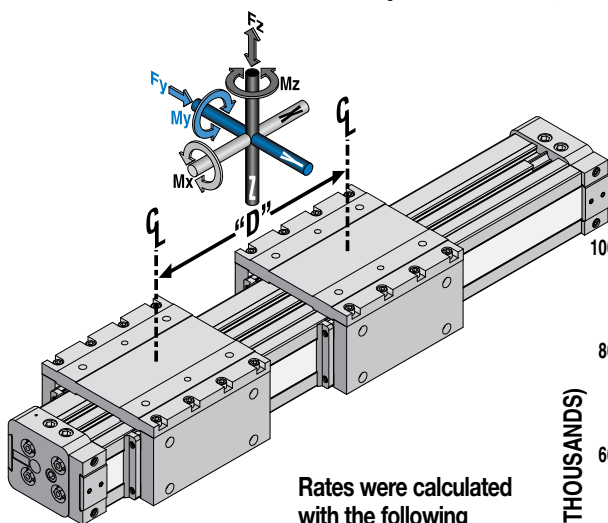

Rates were calculated with the following assumptions:

- 1.) Coupling between carriers is rigid.
- 2.) Load is equally distributed between carriers.
- 3.) Coupling device applies no misalignment loads to carriers.

LOAD vs. DISTANCE BC3 SERIES

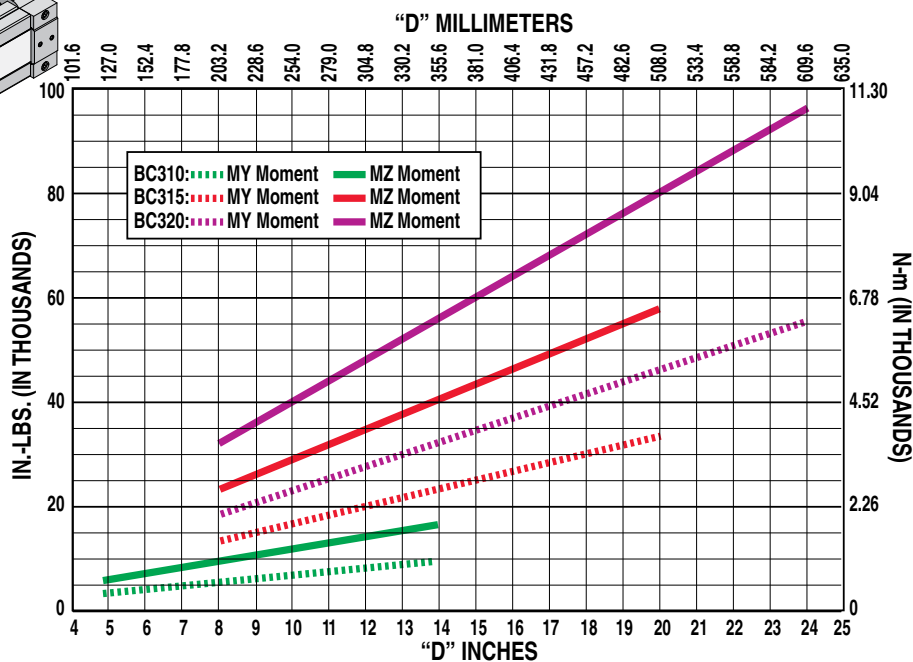


MODEL NO.	"D" MIN.	MAXIMUM BENDING MOMENT			MAXIMUM LOAD	
		M_y^{**}	M_x	M_z^{**}	F_z	F_y
BC3D10DW	4.88 in.	3328 in.-lbs.	1314 in.-lbs.	5768 in.-lbs.	1364 lbs.	2364 lbs.
BC3D15DW	8.07 in.	13558 in.-lbs.	4936 in.-lbs.	23468 in.-lbs.	3360 lbs.	5816 lbs.
BC3D20DW	8.10 in.	18776 in.-lbs.	9054 in.-lbs.	32530 in.-lbs.	4636 lbs.	8032 lbs.
BC3D10DW	124.0mm	373 N-m	147 N-m	646 N-m	619 kgs.	1072 kgs.
BC3D15DW	205.0mm	1518 N-m	553 N-m	2628 N-m	1524 kgs.	2638 kgs.
BC3D20DW	205.7mm	2103 N-m	1014 N-m	3643 N-m	2103 kgs.	3643 kgs.

* D is distance between carriers.

** Loads calculated are at minimum "D", for substantially higher $M_y + M_z$ loads increase "D" and refer to graph at left

BC3 SINGLE END PORTING - All Sizes

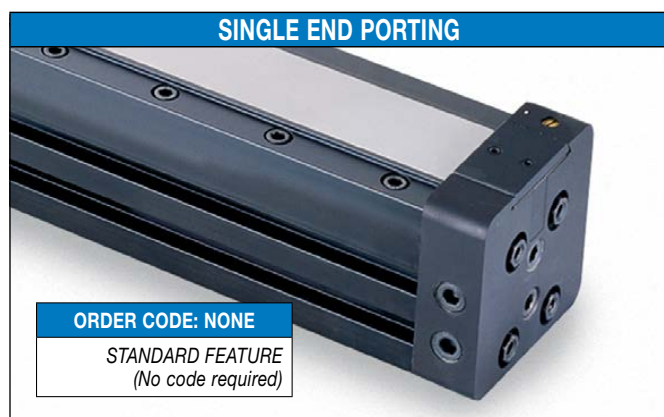


The BC3 is uniquely designed for multiple port locations including single end porting. This is a standard feature on all bore sizes of the BC3. The lower ports on the head assembly only function when used to cross port the cylinder for single end porting.

To convert to single end porting, remove access pipe plug fitting from the opposite head assembly that the air lines will be installed into. Then remove the internal port pipe plug. Reinstall access pipe plug into the bottom of the head. Remove pipe plug from the head that the air lines will be installed.

AIR FLOW DIAGRAMS

SINGLE END PORTING ALLOWS THE GREATEST FLEXIBILITY IN AIR HOOK UP


Converting from Standard porting to Left or Right side porting can be achieved if plugs are placed as in the diagram below.

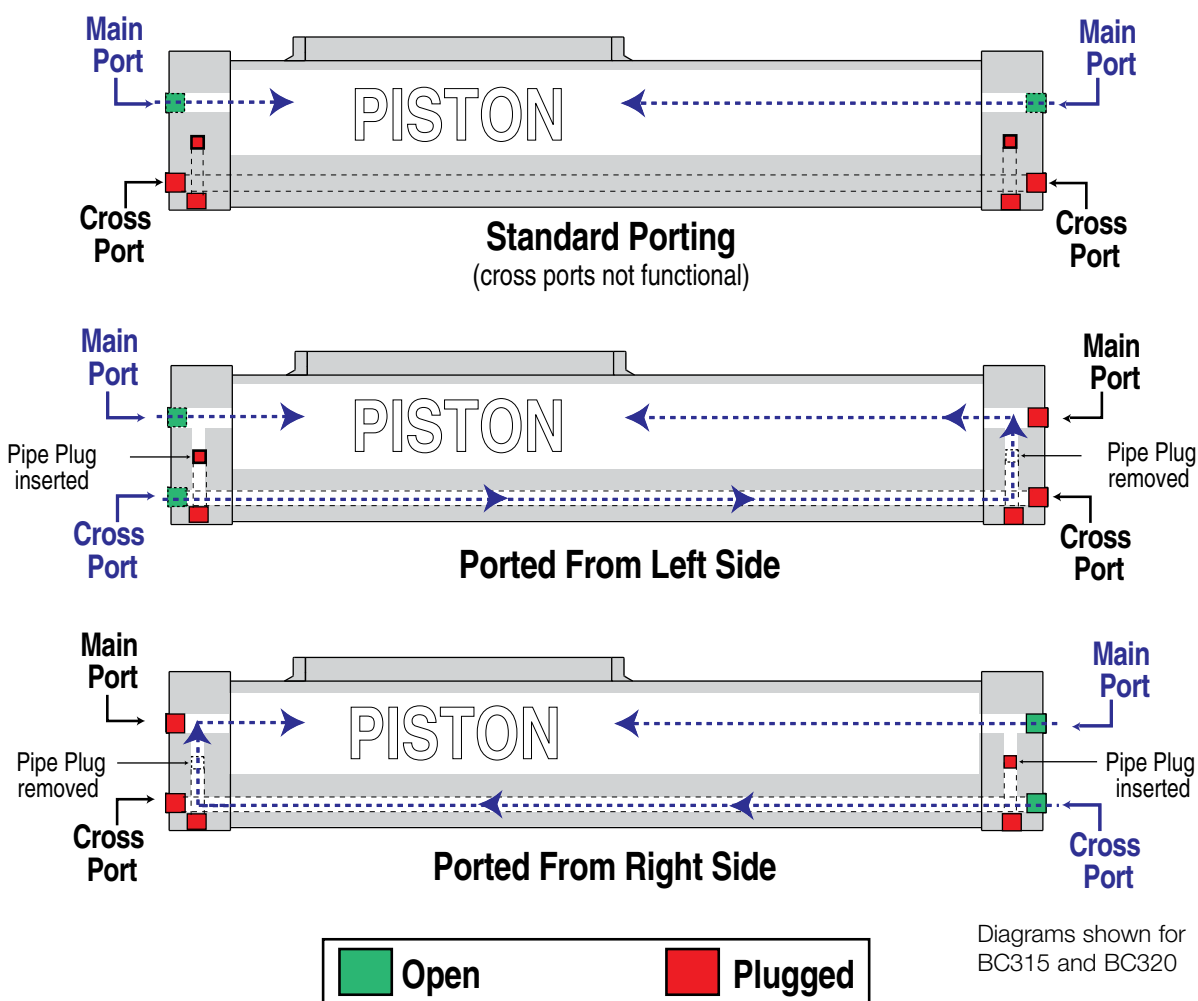

Note: Standard porting may be field converted to ported from left or ported from right. For complete instructions refer to parts sheet.

BC3 SWITCHES - All Sizes

SWITCHES

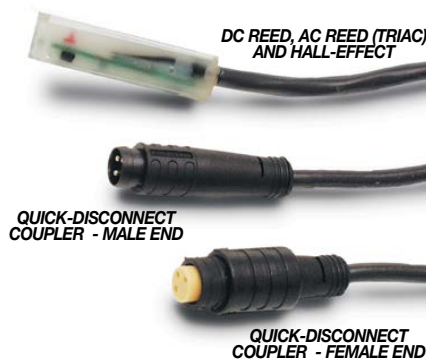




There are 10 sensing choices: DC reed, form A (open) or form C (open or closed); AC reed (Triac, open); Hall-effect, sourcing, PNP (open); Hall-effect, sinking, NPN (open); each with either flying leads or QD (quick disconnect). Commonly used to send analog signals to PLC (programmable logic controllers), TLL, CMOS circuit or other controller device. These switches are activated by the actuator's magnet.

Switches contain reverse polarity protection. QD cables are shielded; shield should be terminated at flying lead end.

If necessary to remove factory installed switches, be sure to reinstall on the same side of actuator with scored face of switch toward internal magnet.

SPECIFICATIONS

	REED DC				REED AC		HALL-EFFECT DC			
ORDER CODE	R T	R M	B T	B M	C T	C M	T T	T M	K T	K M
LEAD	5m	QD*	5m	QD*	5m	QD*	5m	QD*	5m	QD*
CABLE SHIELDING	Unshielded	Shielded†	Unshielded	Shielded†	Unshielded	Shielded†	Unshielded	Shielded†	Unshielded	Shielded†
SWITCHING LOGIC	"A" Normally Open		"C" Normally Open or Closed		Triac Normally Open		PNP (Sourcing) Normally Open		NPN (Sinking) Normally Open	
MECHANICAL CONTACTS	Single-Pole Single-Throw		Single-Pole Double-Throw		Single-Pole Single-Throw		NO, These Are Solid State Components			
COIL DIRECT	Yes		Yes		Yes		—			
POWER LED	None		None		None		None		None	
SIGNAL LED	Red 						Red 		Red 	
OPERATING VOLTAGE	200 Vdc max.		120 Vdc max.		120 Vac max.		5 - 25 Vdc			
OUTPUT RATING	—				—		25 Vdc, 200mA dc			
OPERATING TIME	0.6 msec max. (including bounce)		0.7 msec max. (including bounce)		—		< 10 micro sec.			
OPERATING TEMPERATURE	-40°F [-40°C] to 158°F [70°C]						0°F [-18°C] to 150°F [66°C]			
RELEASE TIME	1.0 msec. max.				—		—			
ON TRIP POINT	—				—		150 Gauss maximum			
OFF TRIP POINT	—				—		40 Gauss minimum			
**POWER RATING (WATTS)	10.0 §		3.0 §§		10.0		5.0			
VOLTAGE DROP	2.6 V typical at 100 mA		NA		—		—			
RESISTANCE	0.1 Ω Initial (Max.)				—		—			
CURRENT CONSUMPTION	—				1 Amp at 86°F [30°C]	0.5 Amp at 140°F [60°C]	200 mA at 25 Vdc			
FREQUENCY	—				47 - 63 Hz		—			
CABLE MIN. BEND RADIUS	STATIC	0.630" [16mm]								
	DYNAMIC	Not Recommended								

CAUTION: DO NOT OVER TIGHTEN SWITCH HARDWARE WHEN INSTALLING!

**** WARNING:** Do not exceed power rating (Watt = Voltage X Amperage). Permanent damage to sensor will occur.

*QD = Quick Disconnect; Male coupler is located 6" [152mm] from sensor, Female coupler to flying lead (part #2503-1025) distance is 197" [5m] also see Cable Shielding specification above

REPLACEMENT OF QD SWITCHES MANUFACTURED BEFORE JULY 1, 1997: It will be necessary to replace or rewire the female end coupler.



Reed Switch Life Expectancy: Up to 200,000,000 cycles (depending on load current, duty cycle and environmental conditions)

†Shielded from the female quick disconnect coupler to the flying leads. Shield should be terminated at flying lead end.


§ Maximum current 500mA (not to exceed 10VA) Refer to Temperature vs. Current graph and Voltage Derating graph

§§ Maximum current 250mA (not to exceed 3VA) Refer to Temperature vs. Current graph and Voltage Derating graph


BC3 SWITCHES - All Sizes

PERFORMANCE


TEMP. vs CURRENT, DC REED

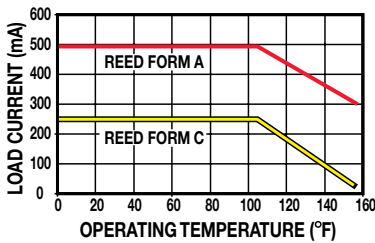

TEMP. vs CURRENT, AC REED




VOLTAGE DERATING, DC REED

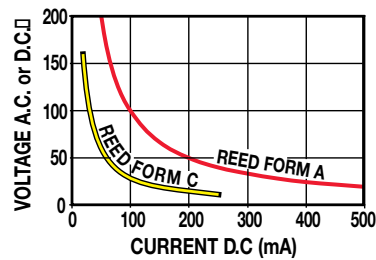


WIRING DIAGRAMS


R T & **R M** DC REED, FORM A

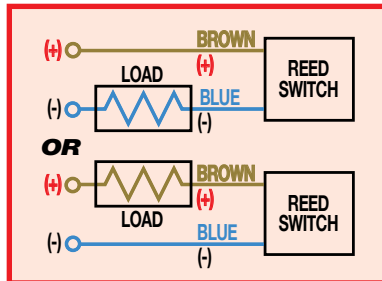


C T & **C M** AC REED, TRIAC

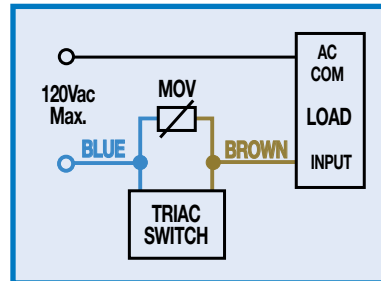


B T & **B M** DC REED, FORM C



T T & **T M** HALL-EFFECT, SOURCING, PNP

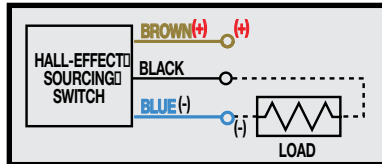

K T & **K M** HALL-EFFECT, SINKING, NPN

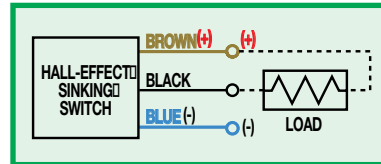

INSTALLATION INFORMATION




⚠ THE NOTCHED FACE OF THE SWITCH INDICATES THE SENSING SURFACE AND MUST FACE TOWARD THE MAGNET.



⚠ THE NOTCHED GROOVE IN THE ACTUATOR INDICATES THE GROOVE TO INSTALL THE SWITCH. CONTACT TOLOMATIC IF SWITCHES ARE REQUIRED ON ANOTHER SIDE OF ACTUATOR.

DIMENSIONS

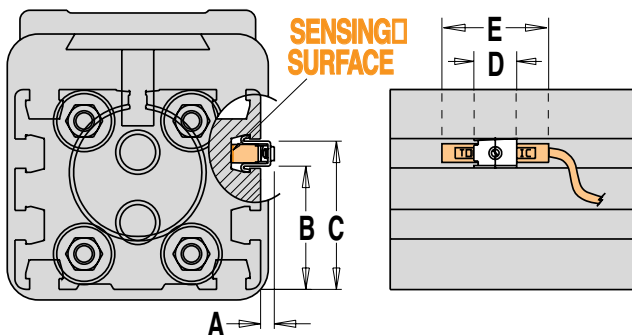

📌 Some actuators may require switch mounting on a specific side of the assembly. Call Tolomatic for details.


SIZE	BORE	A	B	C	D	E
10	1.000	0.194	0.822	0.906	0.500	1.250
15	1.500	0.160	1.428	1.721	0.500	1.250
20	2.000	0.036	1.994	2.287	0.500	1.250

Dimensions in inches

SIZE	BORE	A	B	C	D	E
10	25	4.93	20.88	23.01	12.70	31.75
15	40	4.06	36.27	43.71	12.70	31.75
20	50	0.91	50.65	58.09	12.70	31.75

Dimensions in millimeters

BC3 SHOCK ABSORBERS - All Sizes

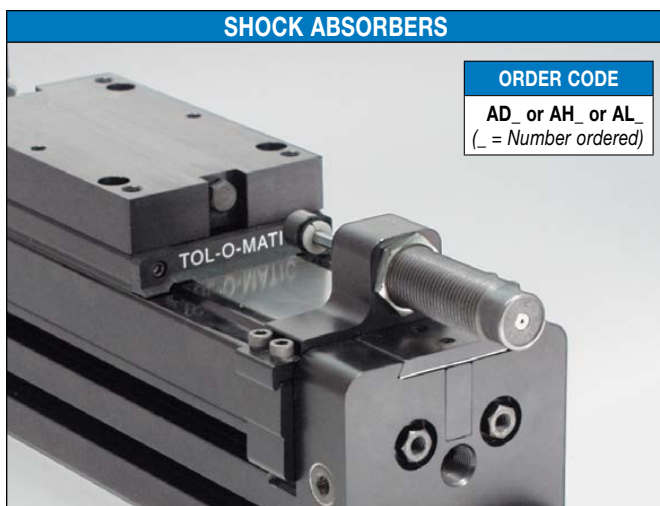

Rodless cylinders with standard internal cushion offer an effective method of decelerating loads. However, all Tolomatic rodless cylinders are capable of carrying heavier loads at higher velocities than the cylinder cushion can absorb. Optional shock absorbers can be used to increase the cylinder's life and broaden the application range for the cylinder model you have chosen.

Tolomatic offers adjustable shock absorbers for the BC3. They allow the shock to be positioned at any point along the cylinder.

A shock stop plate must be used in conjunction with the BC3 shock to provide a stopping surface on the carrier.


Typical shock absorber life varies between 1-2 million cycles (depending on environment) appropriate preventative maintenance should be considered in high cyclic applications.

NOTE: When 2 shock absorbers are ordered, the unit will be assembled with NO internal cushions.

CAUTION: In applications which result in a load bending moment at deceleration, care should be taken to decelerate the load rather than the carrier of the band cylinder.

DIMENSIONS

*NOTE: Shock Absorber option will increase the overall carrier height "M".

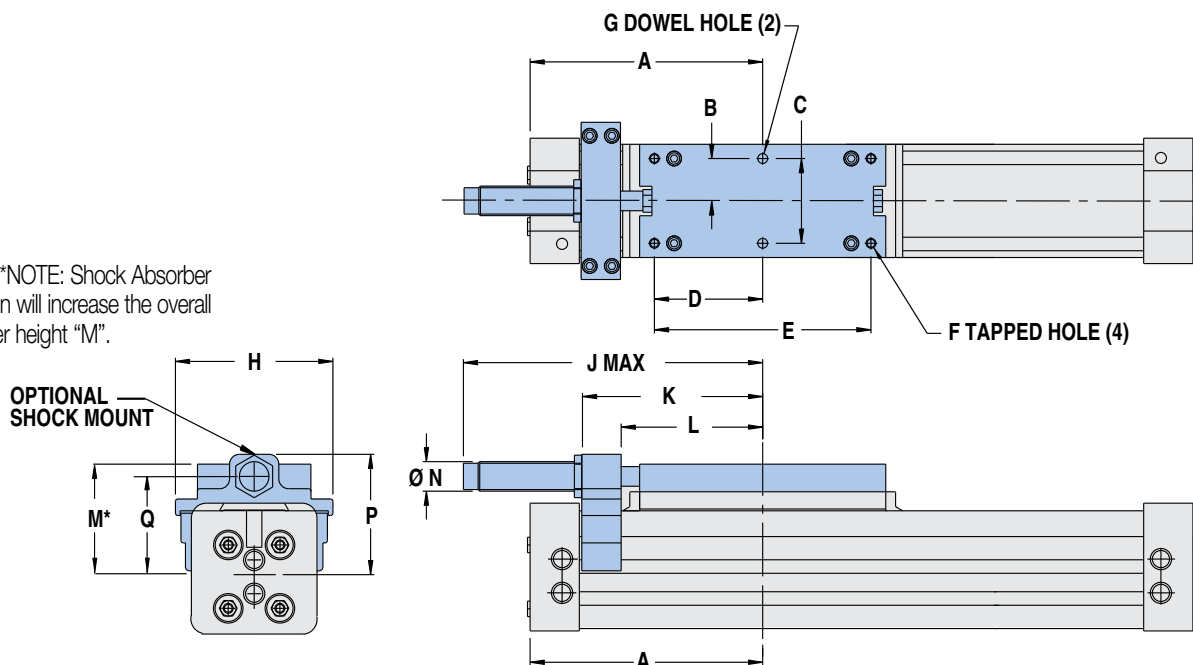

SIZE	BORE	A	B	C	D	E	F	G**	H	J	K	L	M	N	P	Q
10	1.00	3.93	0.890	1.781	1.562	3.125	1/4-20 x .50DP	.252-.251 x .25	3.09	5.47	2.91	2.22	2.223	0.50	2.46	1.964
15	1.50	5.93	1.078	2.156	2.750	5.500	1/4-20 x .50DP	.252-.251 x .25	4.00	7.65	4.59	3.59	2.812	0.75	3.06	2.495
20	2.00	6.27	1.563	3.125	2.938	5.875	5/16-18 x .75DP	.252-.251 x .69	5.06	8.14	4.88	3.88	3.594	1.00	3.88	3.230

**DOWEL PINS .003

Dimensions in inches

SIZE	BORE	A	B	C	D	E	F	G**	H	J	K	L	M	N	P	Q
10	25	99.8	22.62	45.24	39.69	79.38	M6-1.0 x 12.7DP	6.05-6.02 x 6.4	78.5	138.9	73.9	56.4	56.46	14.0	62.5	49.89
15	40	150.7	27.38	54.76	69.85	139.70	M6-1.0 x 12.7DP	6.05-6.02 x 6.4	101.6	194.2	116.6	91.2	71.42	20.0	77.7	63.37
20	50	159.3	39.69	79.38	76.62	149.23	M8-1.25 x 19.1DP	6.05-6.02 x 17.5	128.5	206.8	124.0	98.6	91.29	25.4	98.6	82.04


**DOWEL PINS .076

Dimensions in millimeters

BC3 Shock Absorbers - All Sizes - PERFORMANCE

VELOCITY vs LOAD

BC310

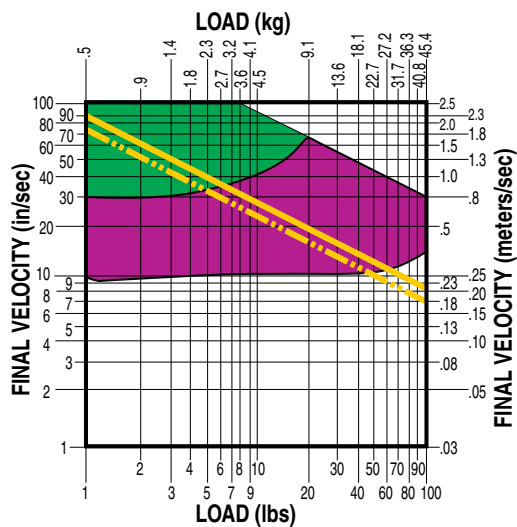


■ LIGHT DUTY (Light load/High velocity)


■ HEAVY DUTY (Heavy load/Low velocity)


— AIR CUSHION DATA

BC315

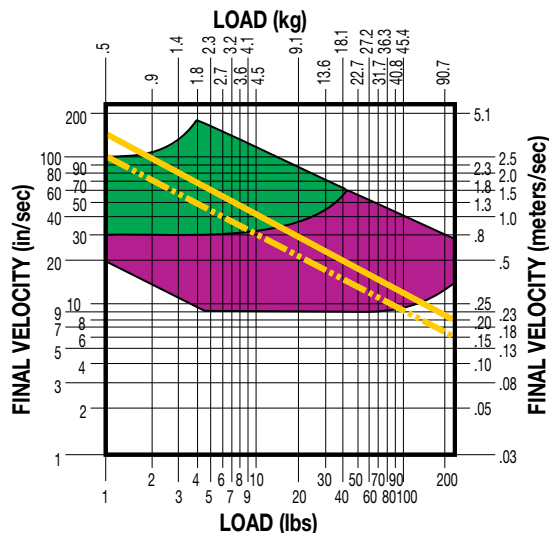


BC320

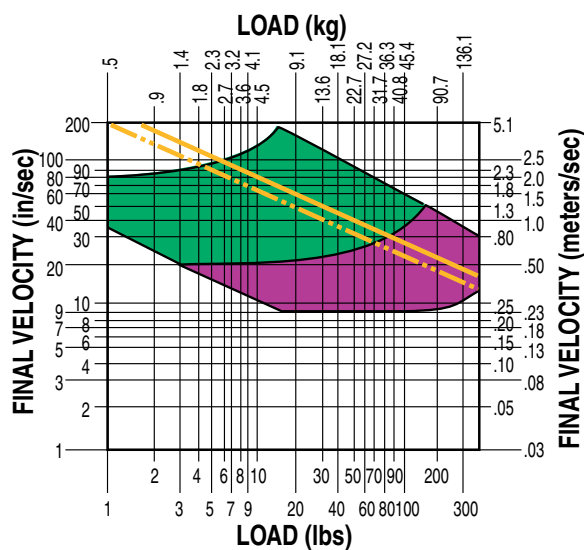

 NOTE: If final (or impact) velocity cannot be calculated directly, a reasonable guideline to use is 2 x average velocity.

Application Data Worksheet



STROKE LENGTH

☐ inch (S) ☒ (K)
(U.S. Standard)

☐ millimeters
(Metric)

AVAILABLE AIR PRESSURE

☐ PSI
(U.S. Standard)

☐ bar
(Metric)

REQUIRED THRUST FORCE

☐ lbf
(U.S. Standard)

☐ N
(Metric)

LOAD

☐ lb
(U.S. Standard)

☐ kg
(Metric)

LOAD CENTER OF GRAVITY DISTANCE TO CARRIER CENTER

☐ inch
(U.S. Standard)

☐ millimeters
(Metric)




d_x _____
 d_y _____
 d_z _____

ORIENTATION


☐ Horizontal

☐ Side


☐ Horizontal Down



☐ Vertical



☐ Angled α

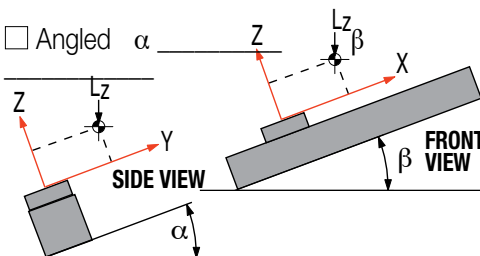

OTHER ISSUES:

(i.e. Environment,
Temperature,
Contamination, etc.)

Contact information:



Fax (1-763-478-8080) or call Tolomatic (1-800-328-2174) with the above information.
We will provide any assistance needed to determine the proper actuator.

Rodless Cylinder Selection Guidelines - BC2, BC3, BC4, LS - All Sizes

PROVIDING LOAD GUIDANCE AND SUPPORT

The process of selecting a load bearing actuator for a given application can be complex. It is highly recommended that you contact Tolomatic or a Tolomatic Distributor for assistance in selecting the best actuator for your application. The following overview of the selection guidelines are for educational purposes only.

1 COMPILE APPLICATION REQUIREMENTS

To determine the appropriate Band Cylinder or Linear Slide model for an application, compile the following information:

- Available pressure (PSI)
- Weight of load (lbs or kg)
- Orientation of load (lbs or kgs)
- Velocity of load (in/sec or mm/sec)
- Stroke length (in or mm)

HINT: Use Tolomatic sizing and selection software, download at: tolomatic.com

2 SELECT CYLINDER SIZE

- Consult the Theoretical Force vs. Pressure charts.
- Cross-reference the load force (or load weight if force is not known) and the available operating pressure. If the intersection falls below the diagonal line, and if moments do not exceed maximum values listed for that model (see Step 3), the actuator will accommodate the application.

If the intersection is above the diagonal line, a larger cylinder bore size should be considered.

NOTE: Additional force may be required to obtain the necessary acceleration for vertical or horizontal loads.

3 DETERMINE NATURE OF LOAD AND THE EFFECT OF BENDING MOMENTS

If the cylinder will guide and support a load located directly over the center of carrier, bending moments will not be a factor in the cylinder selection.

NOTE: The maximum load "L" must not exceed the capacity limits of the cylinder selected.

- Bending Moments

For off center or side loads, determine the distance from the center of mass of the load to the center of the carrier bracket. This measurement is needed to calculate the torque for bending moments. (Refer to Bending Moment chart for each model.)

Should the resulting maximum bending moment exceed figures indicated on the chart, external guides, auxiliary carrier/s or a larger cylinder should be considered.

- Auxiliary Carrier Bending Moments

The auxiliary carrier option (available on most models) increases load carrying capacity and bending moments. Auxiliary carriers can be ordered with or without an internal piston. (Auxiliary

carriers without a piston have no internal cushion on the cylinder end closest to the auxiliary carrier.)

IMPORTANT: When ordering, determine the working stroke, then the minimum distance required between carriers (dimension "D" in Auxiliary Carrier Bending Moments chart). When ordered, Tolomatic's configurator will calculate the overall length of the actuator.

NOTE: breakaway pressure will increase when using auxiliary carriers.

4 DETERMINE INTERNAL CUSHION CAPACITY

- Consult the Cushion Data chart for the model selected. The velocities listed on the cushion charts are final or cushion impact velocities. On applications where the internal cushions or bumpers are to be used, be sure the actual, final or impact velocity is known. If the velocity is not known, use of limit switches with valve deceleration circuits or shock absorbers should be considered. NOTE: The BC205 uses external bumpers in place of internal cushions, LS05 & LS10 do not have cushions or bumpers.
- Cross-reference the final velocity and weight of the load. If the intersection is below the diagonal lines, the internal cushions on the actuator may be used. If the point falls above the dashed diagonal line or if the velocity is not known, use deceleration circuits, external shock absorbers or select a

larger cylinder with greater cushion capacity. On high-cyclic applications, use of external stops is strongly recommended.

5 DETERMINE TUBE SUPPORT REQUIREMENTS

- Consult the Tube Support chart for the model selected.
- Cross reference the load weight and maximum distance between supports.

6 CONSIDER OPTIONS

- Switches— dc Reed, Hall-effect or ac Triac

Band Cylinders and Linear Slides each have different standard features and options. Check the options section for the actuator you have selected.

- Shock Absorbers— if needed.
- Foot Mounting Kits
- Floating Mount Bracket — use when lack of parallelism occurs between the cylinder and an external guided and supported load.
- Single End Porting (BC3, BC4)
- Long Carrier (BC4)
- Proximity Sensors (LS)
- Dual 180° Carrier (BC3)


Application Guidelines

The following conditional statements are intended as general guidelines for use of Tolomatic actuators. Since all applications have their own specific operating requirements, consult Tolomatic, Inc. or your local Tolomatic distributor if an application is unconventional or if questions arise regarding the selection process.

CUSHION NEEDLE ADJUSTMENT (BC2, BC3, BC4, CC, SA, DP, TC ONLY)



Adjust the cushion needles in the cylinder heads carefully to obtain a smooth, hesitation free deceleration for your particular application. If there are questions on proper adjustment, please consult Tolomatic, Inc.

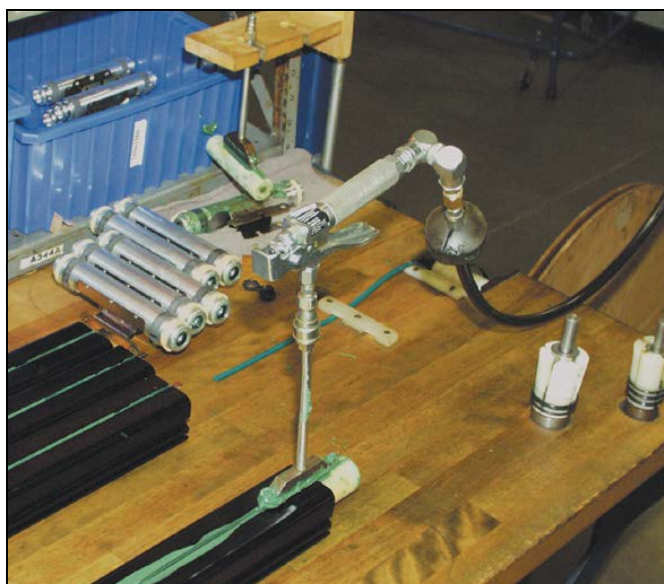

LUBRICATION GUIDELINES

All Tolomatic actuators (except Cable Cylinders) are prelubricated at the factory. To ensure maximum actuator life, the following guidelines should be followed.

• Filtration

We recommend the use of dry, filtered air in our products. "Filtered air" means a level of 10 Micron or less. "Dry" means air should be free of appreciable amounts of moisture. Regular maintenance of installed

filters will generally keep excess moisture in check.


• External Lubricators (optional)

The factory prelubrication of Tolomatic actuators will provide optimal performance without the use of external lubrication. However, external lubricators can further extend service life of pneumatic actuators if the supply is kept constant.

Oil lubricators, (mist or drop) should supply a minimum of 1 drop per 20 standard cubic feet per minute to the

cylinder. As a rule of thumb, double that rate if water in the system is suspected. Demanding conditions may require more lubricant.

If lubricators are used, we recommend a non-detergent, 20cP @ 140°F 10-weight lubricant. Optimum conditions for standard cylinder operation are +32° to +150°F (+0° to 65.5°C).


 **NOTE:** Use of external lubricators may wash away the factory installed lubrication. External lubricants must be maintained in a constant supply or the results will be a dry actuator prone to premature wear.

• Sanitary Environments

Oil mist lubricators must dispense "Food Grade" lubricants to the air supply. Use fluids with ORAL LD50 toxicity ratings of 35 or higher such as Multitherm® PG-1 or equivalent. Demanding conditions can require a review of the application.

FINAL VELOCITY CALCULATION

Velocity calculations for all rodless cylinders need to differentiate between final velocity and average velocity. For example: Stroking a 100-inch BC3 model in one second yields an average velocity of 100 inches per second. To properly determine the inertial forces for cushioning, it is important to know the

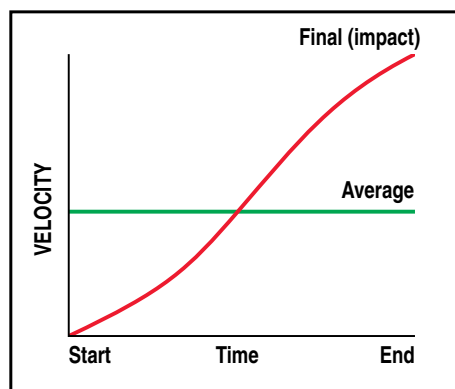

final (or impact) velocity. Rodless cylinders accelerate and decelerate at each end of the stroke. Therefore this acceleration must be considered (see diagram).

If final (or impact) velocity cannot be calculated directly, a reasonable guideline is to use 2 x average velocity.

BC3 APPLICATION GUIDELINES

BC3 DECELERATION CONSIDERATIONS

While the BC3 is capable of carrying very large loads, consideration must be given to how to stop the load at the end of stroke. If Tolomatic cushions or shocks are to be used, please stay within the specifications on page BC3_22. If you should decide to utilize another type of shock absorber, be sure that the deceleration of the load is smooth and over adequate distance.


⚠ CAUTION: In applications which result in a load bending moment at deceleration, care should be taken to decelerate the load rather than the carrier of the band cylinder.

BC3 BEARING LUBRICATION

The bearing system for the BC3 is prelubricated at the factory with a high quality No. 2 lithium-soap base grease. Relubrication is recommended every 10 million linear feet using a lithium-soap base grease for optimal bearing performance. To relubricate, lift back upper sealing band and apply grease directly to the stationary ball ways. Applications that are exposed to moisture or dirt, may require more frequent relubrication.

PERFORMANCE

BC3 CYLINDER/LOAD DEFLECTION

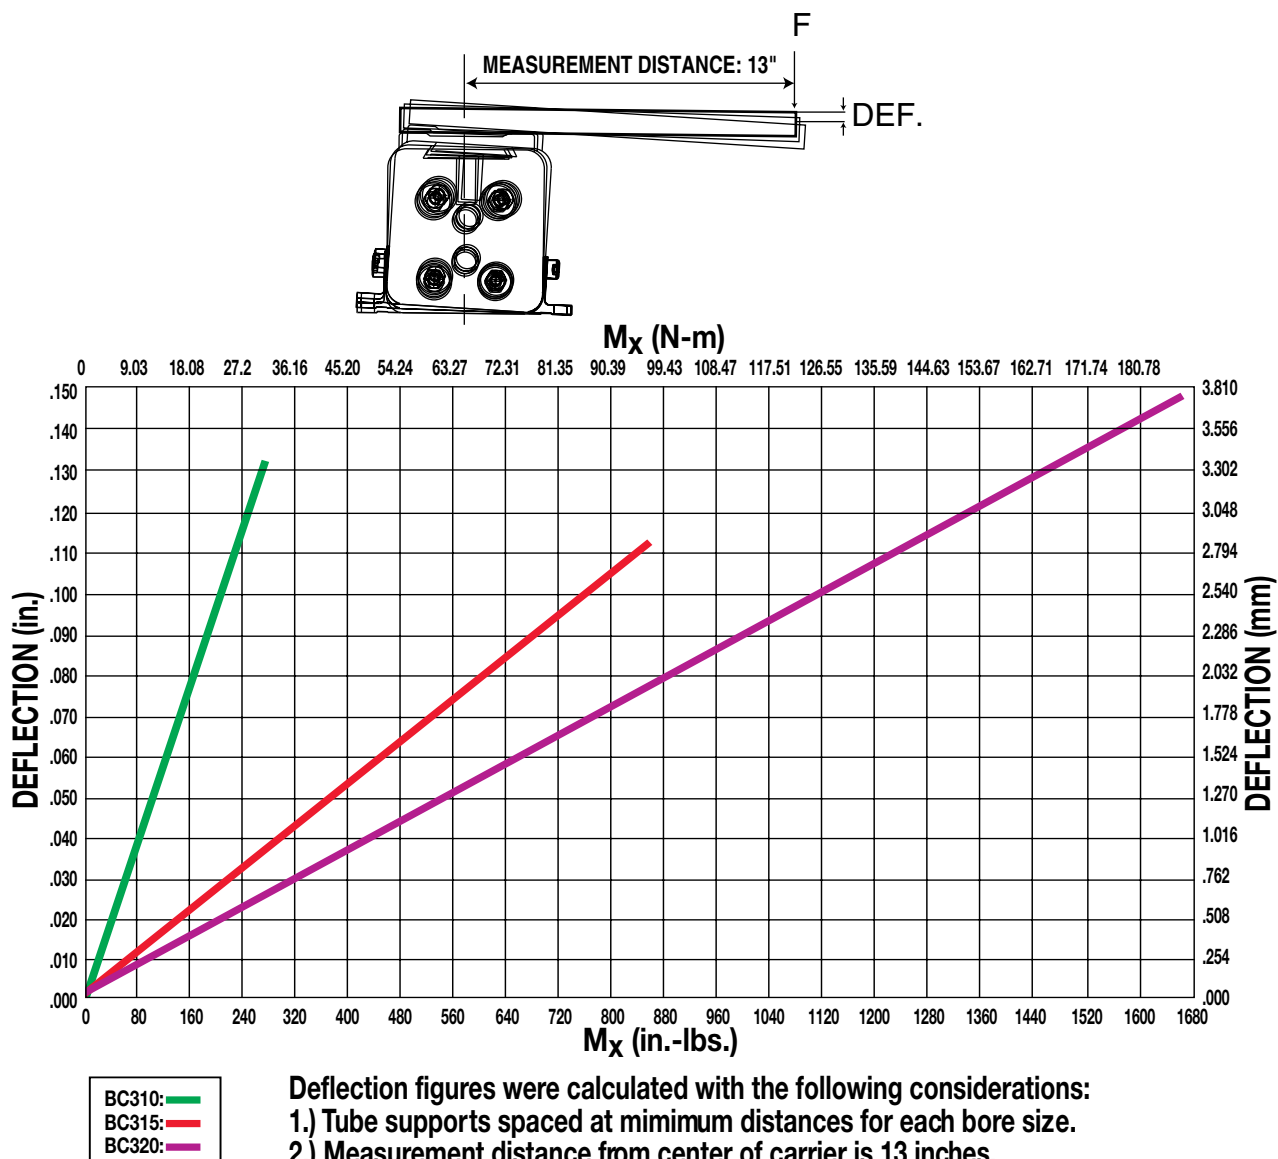

BC3 Service Parts Ordering - ALL Sizes

Inch (U.S. Standard) SIZE	10	D10	15	D15	20	D20
Foot Mount Kits¹	3410-9005	3410-9025	3415-9005	3415-9025	3420-9005	3420-9025
Shock Mount Kit w/ Shock² – Heavy Duty	3410-9013	3410-9013	3415-9013	3415-9013	3420-9013	3420-9013
Shock Mount Kit w/ Shock² – Lite Duty	3410-9010	3410-9010	3415-9010	3415-9010	3420-9010	3420-9010
Shock Mount Kit w/o Shock³ (Hardware Only)	3410-9003	3410-9003	3415-9003	3415-9003	3420-9003	3420-9003
Shock Stop Plate Kit⁴	3410-9004	3410-9004	3415-9004	3415-9004	3420-9004	3420-9004
Tube Supports⁵	3410-9006	3410-9026	3415-9006	3415-9026	3420-9006	3420-9026
Repair Kit⁶	RKBC310NP	RKBC3D10NP	RKBC315NP	RKBC3D15NP	RKBC320NP	RKBC3D20NP

Metric SIZE	10	10D	15	15D	20	20D
Foot Mount Kits¹	4410-9005	4410-9025	4415-9005	4415-9025	4420-9005	4420-9025
Shock Mount Kit w/ Shock² – Heavy Duty	4410-9013	4410-9013	4415-9013	4415-9013	4420-9013	4420-9013
Shock Mount Kit w/ Shock² – Lite Duty	4410-9010	4410-9010	4415-9010	4415-9010	4420-9010	4420-9010
Shock Mount Kit w/o Shock³ (Hardware Only)	4410-9003	4410-9003	4415-9003	4415-9003	4420-9003	4420-9003
Shock Stop Plate Kit⁴	4410-9004	4410-9004	4415-9004	4415-9004	4420-9004	4420-9004
Tube Supports⁵	4410-9006	4410-9026	4415-9006	4415-9026	4420-9006	4420-9026
Repair Kit⁶	RKBC310TP(GP)	RKBC310DTP(GP)	RKBC315TP(GP)	RKBC315DTP(GP)	RKBC320TP(GP)	RKBC320DTP(GP)

CONFIG. CODE ORDERING	
Mounting Hardware & FE conn. included	
DESCRIPTION	CODE
Switch Kit, Reed, Form C, 5m	BT
Switch Kit, Reed, Form C, Male Conn.	BM
Switch Kit, Reed, Form A, 5m	RT
Switch Kit, Reed, Form A, Male Conn.	RM
Switch Kit, Triac, 5m	CT
Switch Kit, Triac, Male Conn.	CM
Switch Kit, Hall-effect, Sinking, 5m	KT
Switch Kit, Hall-effect, Sinking, Male Conn.	KM
Switch Kit, Hall-effect, Sourcing, 5m	TT
Switch Kit, Hall-effect, Sourcing, Male Conn.	TM

NOTE: When kit is ordered female connector & all mounting hardware is included

Switch Ordering NOTES:

To order field retrofit switch and hardware kits for all Tolomatic actuators: SW (Then the model and bore size, and type of switch required)

Example: SWBC315RT

(Hardware and Form A Reed switch with 5 meter lead for 1.5" bore BC3 band cylinder)



Service Parts Ordering NOTES:

- 1 Foot Mount Kit contains one bracket and mounting hardware.
- 2 Shock Field Retrofit Kit contains one shock absorber and mounting hardware.
- 3 Shock Field Mount Kit contains one set of mounting hardware.
- 4 Shock Stop Plate Kit contains shock plate, impact bolts, screws and dowel pins.
- 5 Contains one tube support and mounting hardware.
- 6 Repair Kit contains external dust band, internal seal band, wipers, end caps and internal soft seals. Stroke length must be indicated after repair kit code.

BC3 Ordering - ALL Sizes

MODEL, BORE, STROKE

BC3 10 D NP SK 100 0.250

MODEL & MOUNTING

BC3 BC3 Band Cylinder

BORE SIZE

10	1.00"	(25mm)
15	1.50"	(40mm)
20	2.00"	(50mm)

DUAL 180° CARRIER (BC3_14)

D Dual 180° Carrier Option

MOUNTING & PORTS

- NP US standard mounting & NPT ports
- TP† Metric mounting with metric taper port
- GP† Metric mounting with metric parallel port

† The metric version provides metric tapped holes for mounting of the load to the carrier and of the actuator to mounting surfaces & metric ports

STROKE LENGTH & MOUNTING TYPE

- SK _ _ _ Stroke, enter desired stroke length in inches
- SM† _ _ _ Stroke, enter desired stroke length in millimeters

NOTE: Actuator mounting threads and mounting fasteners will be either inch or metric; depending on how stroke length is indicated.

SK = inch mounting
SM = metric mounting

MAXIMUM STROKE

	...SK	...SM
SIZE	in	mm
10	205	5,207
15	202	5,130
20	142	3,606

NOTE: Prelubrication is standard on all BC3 Band Cylinders (see Application Guidelines on page BC3_25)

OPTIONS

DW6 0 TS3 FM2 AH2 BM2

AUXILIARY CARRIER (BC3_16)

DW Auxiliary carrier With piston & "D" distance
"D" Distance between carriers "D" Distance between carriers in inches (SK) or millimeters (SM)

(Same unit of measure as stroke length is required)

MINIMUM "D" DISTANCE BETWEEN CARRIERS

	with Piston	
	in	mm
10	4.88	124.0
15	8.07	205.0
20	8.10	205.7

When ordering auxiliary carrier option, enter the distance required between carriers. The configurator will calculate the overall length of the actuator.

TUBE SUPPORTS (BC3_12)

TS Tube Support & number required

Each TS includes two (2) tube support halves

T-NUTS

TN additional T-Nuts (see individual dimensional drawings for sizes)

FOOT MOUNT (BC3_13)

FM Foot Mount & number required (1 or 2)

SHOCK ABSORBERS (BC3_21)

- *AD Shock hardware Only and number required
- *AH Shock, Heavy duty and number required
- *AL Shock, Light duty and number required

***NOTE:** When shock absorbers are ordered cushion seals are removed.

SWITCHES (BC3_19)

	TYPE	QUICK-DISCONNECT	CODE	QUANTITY	LEAD LENGTH
REED	Form A	QD	RM	After code enter quantity desired	5 meters
		no	RT		
HALL-EFFECT	Form C	QD	BM		
		no	BT		
	Sinking	QD	KM		
		no	KT		
TRIAC	Sourcing	QD	TM		
		no	TT		
		QD	CM		
		no	CT		



**1 WEEK
BUILT-TO-ORDER**

Not all codes listed are compatible with all options. Contact Tolomatic with any questions.